

 This work is protected by
US copyright laws and is for
instructors' use only.

Online Instructor's Manual
to accompany

Applied Fluid Mechanics

Seventh Edition

Robert L. Mott
University of Dayton

Joseph A. Untener
University of Dayton

Prentice Hall

Boston Columbus Indianapolis New York San Francisco Hoboken

Amsterdam Cape Town Dubai London Madrid Milan Munich Paris Montreal Toronto

Delhi Mexico City Sao Paulo Sydney Hong Kong Seoul Singapore Taipei Tokyo



This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.

Copyright © 2015, 2006, 2000, 1994 Pearson Education, Inc., publishing as Prentice Hall, Hoboken, New Jersey and Columbus, Ohio. All rights reserved. Manufactured in the United States of America. This publication is protected by Copyright, and permission should be obtained from the publisher prior to any prohibited reproduction, storage in a retrieval system, or transmission in any form or by any means, electronic, mechanical, photocopying, recording, or likewise. To obtain permission(s) to use material from this work, please submit a written request to Pearson Education, Inc., Permissions Department, 221 River Street, Hoboken, New Jersey.

Many of the designations by manufacturers and seller to distinguish their products are claimed as trademarks. Where those designations appear in this book, and the publisher was aware of a trademark claim, the designations have been printed in initial caps or all caps.

10 9 8 7 6 5 4 3 2 1



ISBN-13: 978-0-13-255897-6
ISBN-10: 0-13-255897-1

Table of Contents

1. The Nature of Fluids and the Study of Fluid Mechanics	1
2. Viscosity of Fluids	14
3. Pressure Measurement	20
4. Forces Due to Static Fluids	28
5. Buoyancy and Stability	49
6. Flow of Fluids and Bernoulli's Equation	68
7. General Energy Equation	98
8. Reynolds Number, Laminar Flow, Turbulent Flow, and Energy Losses Due to Friction	113
9. Velocity Profiles for Circular Sections and Flow in Noncircular Sections	135
10. Minor Losses	151
11. Series Pipe Line Systems	166
12. Parallel and Branching Pipeline Systems	218
13. Pump Selection and Application	245
14. Open-Channel Flow	251
15. Flow Measurement	268
16. Forces due to Fluid in Motion	273
17. Drag & Lift	284
18. Fans, Blowers, Compressors, & the Flow of Gases	293
19. Flow of Air in Ducts	302

CHAPTER ONE

THE NATURE OF FLUIDS AND THE STUDY OF FLUID MECHANICS

Conversion factors

1.1 $1250 \text{ mm}(1 \text{ m}/10^3 \text{ mm}) = \mathbf{1.25 \text{ m}}$

1.2 $1600 \text{ mm}^2[1 \text{ m}^2/(10^3 \text{ mm})^2] = \mathbf{1.6 \times 10^{-3} \text{ m}^2}$

1.3 $3.65 \times 10^3 \text{ mm}^3[1 \text{ m}^3/(10^3 \text{ mm})^3] = \mathbf{3.65 \times 10^{-6} \text{ m}^3}$

1.4 $2.05 \text{ m}^2[(10^3 \text{ mm})^2/\text{m}^2] = \mathbf{2.05 \times 10^6 \text{ mm}^2}$

1.5 $0.391 \text{ m}^3[(10^3 \text{ mm})^3/\text{m}^3] = \mathbf{391 \times 10^6 \text{ mm}^3}$

1.6 $55.0 \text{ gal}(0.00379 \text{ m}^3/\text{gal}) = \mathbf{0.208 \text{ m}^3}$

1.7 $\frac{80 \text{ km}}{\text{h}} \times \frac{10^3 \text{ m}}{\text{km}} \times \frac{1 \text{ h}}{3600 \text{ s}} = \mathbf{22.2 \text{ m/s}}$

1.8 $25.3 \text{ ft}(0.3048 \text{ m/ft}) = \mathbf{7.71 \text{ m}}$

1.9 $1.86 \text{ mi}(1.609 \text{ km/mi})(10^3 \text{ m/km}) = \mathbf{2993 \text{ m}}$

1.10 $8.65 \text{ in}(25.4 \text{ mm/in}) = \mathbf{220 \text{ mm}}$

1.11 $2580 \text{ ft}(0.3048 \text{ m/ft}) = \mathbf{786 \text{ m}}$

1.12 $480 \text{ ft}^3(0.0283 \text{ m}^3/\text{ft}^3) = \mathbf{13.6 \text{ m}^3}$

1.13 $7390 \text{ cm}^3[1 \text{ m}^3/(100 \text{ cm})^3] = \mathbf{7.39 \times 10^{-3} \text{ m}^3}$

1.14 $6.35 \text{ L}(1 \text{ m}^3/1000 \text{ L}) = \mathbf{6.35 \times 10^{-3} \text{ m}^3}$

1.15 $6.0 \text{ ft/s}(0.3048 \text{ m/ft}) = \mathbf{1.83 \text{ m/s}}$

1.16 $\frac{2500 \text{ ft}^3}{\text{min}} \times \frac{0.0283 \text{ m}^3}{\text{ft}^3} \times \frac{1 \text{ min}}{60 \text{ s}} = \mathbf{1.18 \text{ m}^3/\text{s}}$

Consistent units in an equation

1.17 $v = \frac{s}{t} = \frac{0.50 \text{ km}}{10.6 \text{ s}} \times \frac{10^3 \text{ m}}{\text{km}} = \mathbf{47.2 \text{ m/s}}$

$$1.18 \quad v = \frac{s}{t} = \frac{1.50 \text{ km}}{5.2 \text{ s}} \times \frac{3600 \text{ s}}{\text{h}} = \mathbf{1038 \text{ km/h}}$$

$$1.19 \quad v = \frac{s}{t} = \frac{1000 \text{ ft}}{14 \text{ s}} \times \frac{1 \text{ mi}}{5280 \text{ ft}} \times \frac{3600 \text{ s}}{\text{h}} = \mathbf{48.7 \text{ mi/h}}$$

$$1.20 \quad v = \frac{s}{t} = \frac{1.0 \text{ mi}}{5.7 \text{ s}} \times \frac{3600 \text{ s}}{\text{h}} = \mathbf{632 \text{ mi/h}}$$

$$1.21 \quad a = \frac{2s}{t^2} = \frac{(2)(3.2 \text{ km})}{(4.7 \text{ min})^2} \times \frac{10^3 \text{ m}}{\text{km}} \times \frac{1 \text{ min}^2}{(60 \text{ s})^2} = \mathbf{8.05 \times 10^{-2} \text{ m/s}^2}$$

$$1.22 \quad t = \sqrt{\frac{2s}{a}} = \sqrt{\frac{(2)(13 \text{ m})}{9.81 \text{ m/s}^2}} = \mathbf{1.63 \text{ s}}$$

$$1.23 \quad a = \frac{2s}{t^2} = \frac{(2)(3.2 \text{ km})}{(4.7 \text{ min})^2} \times \frac{10^3 \text{ m}}{\text{km}} \times \frac{1 \text{ ft}}{0.3048 \text{ m}} \times \frac{1 \text{ min}^2}{(60 \text{ s})^2} = \mathbf{0.264 \frac{\text{ft}}{\text{s}^2}}$$

$$1.24 \quad t = \sqrt{\frac{2s}{a}} = \sqrt{\frac{(2)(53 \text{ in})}{32.2 \text{ ft/s}^2} \times \frac{1 \text{ ft}}{12 \text{ in}}} = \mathbf{0.524 \text{ s}}$$

$$1.25 \quad KE = \frac{mv^2}{2} = \frac{(15 \text{ kg})(1.2 \text{ m/s})^2}{2} = 10.8 \frac{\text{kg} \cdot \text{m}^2}{\text{s}^2} = \mathbf{10.8 \text{ N} \cdot \text{m}}$$

$$1.26 \quad KE = \frac{mv^2}{2} = \frac{(3600 \text{ kg})}{2} \times \left(\frac{16 \text{ km}}{\text{h}} \right)^2 \times \frac{(10^3 \text{ m})^2}{\text{km}^2} \times \frac{1 \text{ h}^2}{(3600 \text{ s})^2} = \mathbf{35.6 \times 10^3 \frac{\text{kg} \cdot \text{m}^2}{\text{s}^2}}$$

$$KE = \mathbf{35.6 \text{ kN} \cdot \text{m}}$$

$$1.27 \quad KE = \frac{mv^2}{2} = \frac{75 \text{ kg}}{2} \times \left(\frac{6.85 \text{ m}}{\text{s}} \right)^2 = 1.76 \times 10^3 \frac{\text{kg} \cdot \text{m}^2}{\text{s}^2} = \mathbf{1.76 \text{ kN} \cdot \text{m}}$$

$$1.28 \quad m = \frac{2(KE)}{v^2} = \frac{(2)(38.6 \text{ N} \cdot \text{m})}{1} \times \left(\frac{\text{h}}{31.5 \text{ km}} \right)^2 \times \frac{1 \text{ kg} \cdot \text{m}}{\text{s}^2 \cdot \text{N}} \times \frac{(3600 \text{ s})^2}{\text{h}^2} \times \frac{1 \text{ km}^2}{(10^3 \text{ m})^2}$$

$$m = \frac{(2)(38.6)(3600)^2}{(31.5)^2(10^3)^2} \text{ kg} = \mathbf{1.008 \text{ kg}}$$

$$1.29 \quad m = \frac{2(KE)}{v^2} = \frac{(2)(94.6 \text{ mN} \cdot \text{m})}{(2.25 \text{ m/s})^2} \times \frac{10^{-3} \text{ N}}{\text{mN}} \times \frac{1 \text{ kg} \cdot \text{m}}{\text{s}^2 \cdot \text{N}} \times \frac{10^3 \text{ g}}{\text{kg}} = \mathbf{37.4 \text{ g}}$$

$$1.30 \quad v = \sqrt{\frac{2(KE)}{m}} = \sqrt{\frac{2(15 \text{ N} \cdot \text{m})}{12 \text{ kg}} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}}} = \mathbf{1.58 \text{ m/s}}$$

$$1.31 \quad v = \sqrt{\frac{2(KE)}{m}} = \sqrt{\frac{2(212 \text{ mN} \cdot \text{m})}{175 \text{ g}}} \times \frac{10^{-3} \text{ N}}{\text{mN}} \times \frac{10^3 \text{ g}}{\text{kg}} \times \frac{1 \text{ kg} \cdot \text{m}}{\text{s}^2 \cdot \text{N}} = \mathbf{1.56 \text{ m/s}}$$

$$1.32 \quad KE = \frac{mv^2}{2} = \frac{(1 \text{ slug})(4 \text{ ft/s})^2}{2} \times \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{8.00 \text{ lb} \cdot \text{ft}}$$

$$1.33 \quad KE = \frac{mv^2}{2} = \frac{wv^2}{2g} = \frac{(8000 \text{ lb})(10 \text{ mi})^2}{(2)(32.2 \text{ ft/s}^2)(\text{h})^2} \times \frac{1 \text{ h}^2}{(3600 \text{ s})^2} \times \frac{(5280 \text{ ft})^2}{\text{mi}^2}$$

$$KE = \frac{(8000)(10)^2(5280)^2}{(2)(32.2)(3600)^2} \text{ lb} \cdot \text{ft} = \mathbf{26700 \text{ lb} \cdot \text{ft}}$$

$$1.34 \quad KE = \frac{mv^2}{2} = \frac{wv^2}{2g} = \frac{(150 \text{ lb})(20 \text{ ft/s})^2}{(2)(32.2 \text{ ft/s}^2)} = \mathbf{932 \text{ lb} \cdot \text{ft}}$$

$$1.35 \quad m = \frac{2(KE)}{v^2} = \frac{2(15 \text{ lb} \cdot \text{ft})}{(2.2 \text{ ft/s}^2)^2} = 6.20 \frac{\text{lb} \cdot \text{s}^2}{\text{ft}} = \mathbf{6.20 \text{ slugs}}$$

$$1.36 \quad w = \frac{2g(KE)}{v^2} = \frac{2(32.2 \text{ ft})(38.6 \text{ lb} \cdot \text{ft})(\text{h}^2)}{\text{s}^2(19.5 \text{ mi})^2} \times \frac{1 \text{ mi}^2}{(5280 \text{ ft})^2} \times \frac{(3600 \text{ s})^2}{\text{h}^2}$$

$$w = \frac{(2)(32.2)(38.6)(3600)^2}{(19.5)^2(5280)^2} \text{ lb} = \mathbf{3.04 \text{ lb}}$$

$$1.37 \quad v = \sqrt{\frac{2g(KE)}{w}} = \sqrt{\frac{2(32.2 \text{ ft/s}^2)(10 \text{ lb} \cdot \text{ft})}{30 \text{ lb}}} = \mathbf{4.63 \text{ ft/s}}$$

$$1.38 \quad v = \sqrt{\frac{2g(KE)}{w}} = \sqrt{\frac{2(32.2 \text{ ft/s}^2)(30 \text{ oz} \cdot \text{in})}{6.0 \text{ oz}}} \times \frac{1 \text{ ft}}{12 \text{ in}} = \mathbf{5.18 \text{ ft/s}}$$

$$1.39 \quad \text{ERA} = \frac{39 \text{ runs}}{141 \text{ innings}} \times \frac{9 \text{ innings}}{\text{game}} = \mathbf{2.49 \text{ runs/game}}$$

$$1.40 \quad \frac{3.12 \text{ runs}}{\text{game}} \times \frac{1 \text{ game}}{9 \text{ innings}} \times 150 \text{ innings} = \mathbf{52 \text{ runs}}$$

$$1.41 \quad 40 \text{ runs} \times \frac{1 \text{ game}}{2.79 \text{ runs}} \times \frac{9 \text{ innings}}{\text{game}} = \mathbf{129 \text{ innings}}$$

$$1.42 \quad \text{ERA} = \frac{49 \text{ runs}}{123 \text{ innings}} \times \frac{9 \text{ innings}}{\text{game}} = \mathbf{3.59 \text{ runs/game}}$$

The definition of pressure

$$1.43 \quad p = F/A = 2500 \text{ lb}/[\pi(3.00 \text{ in})^2/4] = \mathbf{354 \text{ lb/in}^2 = 354 \text{ psi}}$$

$$1.44 \quad p = F/A = 8700 \text{ lb}/[\pi(1.50 \text{ in})^2/4] = \mathbf{4923 \text{ psi}}$$

$$1.45 \quad p = \frac{F}{A} = \frac{12.0 \text{ kN}}{\pi(75 \text{ mm})^2/4} \times \frac{10^3 \text{ N}}{\text{kN}} \times \frac{(10^3 \text{ mm})^2}{\text{m}^2} = 2.72 \times 10^6 \frac{\text{N}}{\text{m}^2} = \mathbf{2.72 \text{ MPa}}$$

$$1.46 \quad p = \frac{F}{A} = \frac{38.8 \times 10^3 \text{ N}}{\pi(40 \text{ mm})^2/4} \times \frac{(10^3 \text{ mm})^2}{\text{m}^2} = 30.9 \times 10^6 \frac{\text{N}}{\text{m}^2} = \mathbf{30.9 \text{ MPa}}$$

$$1.47 \quad p = \frac{F}{A} = \frac{6000 \text{ lb}}{\pi(8.0 \text{ in})^2/4} = \mathbf{119 \text{ psi}}$$

$$1.48 \quad p = \frac{F}{A} = \frac{18000 \text{ lb}}{\pi(2.50 \text{ in})^2/4} = \mathbf{3667 \text{ psi}}$$

$$1.49 \quad F = pA = \frac{20.5 \times 10^6 \text{ N}}{\text{m}^2} \times \frac{\pi(50 \text{ mm})^2}{4} \times \frac{1 \text{ m}^2}{(10^3 \text{ mm})^2} = \mathbf{40.25 \text{ kN}}$$


$$1.50 \quad F = pA = (6000 \text{ lb/in}^2)(\pi[2.00 \text{ in}]^2/4) = \mathbf{18850 \text{ lb}}$$

$$1.51 \quad p = \frac{F}{A} = \frac{F}{\pi D^2/4} = \frac{4F}{\pi D^2}: \text{ Then } D = \sqrt{\frac{4F}{\pi p}}$$
$$D = \sqrt{\frac{4(20000 \text{ lb})}{\pi(5000 \text{ lb/in}^2)}} = \mathbf{2.26 \text{ in}}$$

$$1.52 \quad D = \sqrt{\frac{4F}{\pi p}} = \sqrt{\frac{4(30 \times 10^3 \text{ N})}{\pi(15.0 \times 10^6 \text{ N/m}^2)}} = 50.5 \times 10^{-3} \text{ m} = \mathbf{50.5 \text{ mm}}$$


$$1.53 \quad F = pA = \frac{p[\pi D^2]}{4} = \frac{500 \text{ lb}(\pi)(D \text{ in})^2}{\text{in}^2 4} = 392.7 D^2 \text{ lb}$$

$D(\text{in})$	$D^2(\text{in}^2)$	$F(\text{lb})$
1.00	1.00	393
2.00	4.00	1571
3.00	9.00	3534
4.00	16.00	6283
5.00	25.00	9817
6.00	36.00	14137
7.00	49.00	19242
8.00	64.00	25133

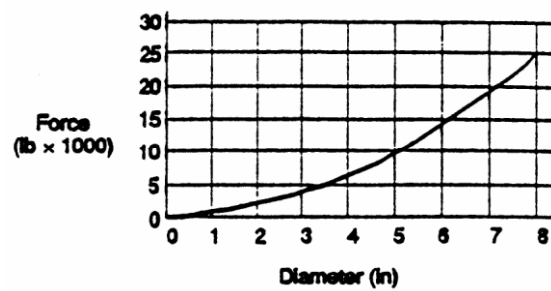

$$1.54 \quad p = \frac{F}{A} = \frac{F}{\pi D^2/4} = \frac{4F}{\pi D^2} = \frac{4(5000 \text{ lb})}{\pi(D \text{ in})^2} = \frac{6366}{D^2} \text{ psi}$$

$D(\text{in})$	$D^2(\text{in}^2)$	$p(\text{psi})$
1.00	1.00	6366
2.00	4.00	1592
3.00	9.00	707
4.00	16.00	398
5.00	25.00	255
6.00	36.00	177
7.00	49.00	130
8.00	64.00	99

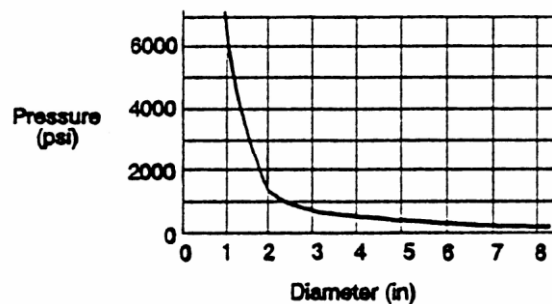

$$1.55 \quad (\text{Variable Answers}) \text{ Example: } w = 160 \text{ lb} (4.448 \text{ N/lb}) = 712 \text{ N}$$

$$p = \frac{F}{A} = \frac{712 \text{ N}}{\pi(20 \text{ mm})^2/4} \times \frac{(10^3 \text{ mm})^2}{\text{m}^2} = 2.77 \times 10^6 \text{ Pa} = 2.27 \text{ MPa}$$

$$p = 2.27 \times 10^6 \text{ Pa} (1 \text{ psi}/6895 \text{ Pa}) = 329 \text{ psi}$$

$$1.56 \quad (\text{Variable Answers}) \text{ using } p = 2.27 \text{ MPa}$$

$$F = pA = (2.27 \times 10^6 \text{ N/m}^2)(\pi(0.250 \text{ m})^2/4) = 111 \times 10^3 \text{ N} = 111 \text{ kN}$$

$$F = 111 \text{ kN} (1 \text{ lb}/4.448 \text{ N}) = 25050 \text{ lb}$$

Bulk modulus

$$1.57 \quad \Delta p = -E(\Delta V/V) = -130000 \text{ psi}(-0.01) = \mathbf{1300 \text{ psi}}$$
$$\Delta p = -896 \text{ MPa}(-0.01) = \mathbf{8.96 \text{ MPa}}$$

$$1.58 \quad \Delta p = -E(\Delta V/V) = -3.59 \times 10^6 \text{ psi}(-0.01) = \mathbf{35900 \text{ psi}}$$
$$\Delta p = -24750 \text{ MPa}(-0.01) = \mathbf{247.5 \text{ MPa}}$$

$$1.59 \quad \Delta p = -E(\Delta V/V) = -189000 \text{ psi}(-0.01) = \mathbf{1890 \text{ psi}}$$
$$\Delta p = -1303 \text{ MPa}(-0.01) = \mathbf{13.03 \text{ MPa}}$$

$$1.60 \quad \Delta V/V = -0.01; \Delta V = 0.01V = 0.01 \text{ AL}$$

Assume area of cylinder does not change.

$$\Delta V = A(\Delta L) = 0.01 \text{ AL}$$

Then $\Delta L = 0.01 L = 0.01(12.00 \text{ in}) = \mathbf{0.120 \text{ in}}$

$$1.61 \quad \frac{\Delta V}{V} = \frac{-p}{E} = \frac{-3000 \text{ psi}}{189000 \text{ psi}} = -0.0159 = \mathbf{-1.59\%}$$

$$1.62 \quad \frac{\Delta V}{V} = \frac{-20.0 \text{ MPa}}{1303 \text{ MPa}} = -0.0153 = \mathbf{-1.53\%}$$

$$1.63 \quad \text{Stiffness} = \text{Force/Change in Length} = F/\Delta L$$

$$\text{Bulk Modulus} = E = \frac{-p}{\Delta V/V} = \frac{-pV}{\Delta V}$$

$$\text{But } p = F/A; V = AL; \Delta V = -A(\Delta L)$$

$$E = \frac{-F}{A} \times \frac{AL}{-A(\Delta L)} = \frac{FL}{A(\Delta L)}$$

$$\frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb} \pi (0.5 \text{ in})^2}{\text{in}^2 (42 \text{ in})} = \mathbf{884 \text{ lb/in}}$$

$$1.64 \quad \frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb} \pi (0.5 \text{ in})^2}{\text{in}^2 (10.0 \text{ in})(4)} = \mathbf{3711 \text{ lb/in}} \quad \mathbf{4.2 \text{ times higher}}$$

$$1.65 \quad \frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb} \pi (2.00 \text{ in})^2}{\text{in}^2 (42.0 \text{ in})(4)} = \mathbf{14137 \text{ lb/in}} \quad \mathbf{16 \text{ times higher}}$$

$$1.66 \quad \text{Use large diameter cylinders and short strokes.}$$

Force and mass

$$1.67 \quad m = \frac{w}{g} = \frac{610 \text{ N}}{9.81 \text{ m/s}^2} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{62.2 \text{ kg}}$$

- 1.68 $m = \frac{w}{g} = \frac{1.35 \times 10^3 \text{ N}}{9.81 \text{ m/s}^2} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{138 \text{ kg}}$
- 1.69 $w = mg = 825 \text{ kg} \times 9.81 \text{ m/s}^2 = 8093 \text{ kg} \cdot \text{m/s}^2 = \mathbf{8093 \text{ N}}$
- 1.70 $w = mg = 450 \text{ g} \times \frac{1 \text{ kg}}{10^3 \text{ g}} \times 9.81 \text{ m/s}^2 = 4.41 \text{ kg} \cdot \text{m/s}^2 = \mathbf{4.41 \text{ N}}$
- 1.71 $m = \frac{w}{g} = \frac{7.8 \text{ lb}}{32.2 \text{ ft/s}^2} = 0.242 \frac{\text{lb} \cdot \text{s}^2}{\text{ft}} = \mathbf{0.242 \text{ slugs}}$
- 1.72 $m = \frac{w}{g} = \frac{42.0 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{1.304 \text{ slugs}}$
- 1.73 $w = mg = 1.58 \text{ slugs} \times 32.2 \text{ ft/s}^2 \times \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{50.9 \text{ lb}}$
- 1.74 $w = mg = 0.258 \text{ slugs} \times 32.2 \text{ ft/s}^2 \times \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{8.31 \text{ lb}}$
- 1.75 $m = \frac{w}{g} = \frac{160 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{4.97 \text{ slugs}}$
 $w = 160 \text{ lb} \times 4.448 \text{ N/lb} = \mathbf{712 \text{ N}}$
 $m = 4.97 \text{ slugs} \times 14.59 \text{ kg/slug} = \mathbf{72.5 \text{ kg}}$
- 1.76 $m = \frac{w}{g} = \frac{1.00 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{0.0311 \text{ slugs}}$
 $m = 0.0311 \text{ slugs} \times 14.59 \text{ kg/slug} = \mathbf{0.453 \text{ kg}}$
 $w = 1.00 \text{ lb} \times 4.448 \text{ N/lb} = \mathbf{4.448 \text{ N}}$
- 1.77 $F = w = mg = 1000 \text{ kg} \times 9.81 \text{ m/s}^2 = 9810 \text{ kg} \cdot \text{m/s}^2 = \mathbf{9810 \text{ N}}$
- 1.78 $F = 9810 \text{ N} \times 1.0 \text{ lb}/4.448 \text{ N} = \mathbf{2205 \text{ lb}}$
- 1.79 (Variable Answers) See problem 1.75 for method.

Density, specific weight, and specific gravity

- 1.80 $\gamma_B = (\text{sg})_B \gamma_w = (0.876)(9.81 \text{ kN/m}^3) = \mathbf{8.59 \text{ kN/m}^3}$
 $\rho_B = (\text{sg})_B \rho_w = (0.876)(1000 \text{ kg/m}^3) = \mathbf{876 \text{ kg/m}^3}$
- 1.81 $\rho = \frac{\gamma}{g} = \frac{12.02 \text{ N}}{\text{m}^3} \times \frac{\text{s}^2}{9.81 \text{ m}} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{1.225 \text{ kg/m}^3}$

$$1.82 \quad \gamma = \rho g = 1.964 \text{ kg/m}^3 \times 9.81 \text{ m/s}^2 \times \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} = \mathbf{19.27 \text{ N/m}^3}$$

$$1.83 \quad \text{sg} = \frac{\gamma_o}{\gamma_w @ 4^\circ \text{C}} = \frac{8.860 \text{ kN/m}^3}{9.81 \text{ kN/m}^3} = \mathbf{0.903 \text{ at } 5^\circ \text{C}}$$

$$\text{sg} = \frac{\gamma_o}{\gamma_w @ 4^\circ \text{C}} = \frac{8.483 \text{ kN/m}^3}{9.81 \text{ kN/m}^3} = \mathbf{0.865 \text{ at } 50^\circ \text{C}}$$

$$1.84 \quad \gamma = \frac{w}{V}; V = \frac{w}{\gamma} = \frac{2.25 \text{ kN}}{130.4 \text{ kN/m}^3} = \mathbf{0.0173 \text{ m}^3}$$

$$1.85 \quad V = AL = \pi D^2 L / 4 = \pi (0.150 \text{ m})^2 (0.100 \text{ m}) / 4 = 1.767 \times 10^{-3} \text{ m}^3$$

$$\rho_o = \frac{m}{V} = \frac{1.56 \text{ kg}}{1.767 \times 10^{-3} \text{ m}^3} = \mathbf{883 \text{ kg/m}^3}$$

$$\gamma_o = \rho_o g = 883 \text{ kg/m}^3 \times 9.81 \text{ m/s}^2 \times \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} = 8.66 \times \frac{10^3 \text{ N}}{\text{m}^3} = \mathbf{8.66 \frac{\text{kg}}{\text{m}^3}}$$

$$\text{sg} = \rho_o / \rho_w @ 4^\circ \text{C} = 883 \text{ kg/m}^3 / 1000 \text{ kg/m}^3 = \mathbf{0.883}$$

$$1.86 \quad \gamma = (\text{sg})(\gamma_w @ 4^\circ \text{C}) = 1.258(9.81 \text{ kN/m}^3) = 12.34 \text{ kN/m}^3 = w/V$$

$$w = \gamma V = (12.34 \text{ kN/m}^3)(0.50 \text{ m}^3) = \mathbf{6.17 \text{ kN}}$$

$$m = \frac{w}{g} = \frac{6.17 \text{ kN}}{9.81 \text{ m/s}^2} \times \frac{10^3 \text{ N}}{\text{kN}} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{629 \text{ kg}}$$

$$1.87 \quad w = \gamma V = (\text{sg})(\gamma_w)(V) = (0.68)(9.81 \text{ kN/m}^3)(0.095 \text{ m}^3) = 0.634 \text{ kN} = \mathbf{634 \text{ N}}$$

$$1.88 \quad \gamma = \rho g = (1200 \text{ kg/m}^3)(9.81 \text{ m/s}^2) \left(\frac{1 \text{ N}}{\text{kg} \cdot \text{m/s}^2} \right) = \mathbf{11.77 \text{ kN/m}^3}$$

$$\text{sg} = \frac{\rho}{\rho_w @ 4^\circ \text{C}} = \frac{1200 \text{ kg/m}^3}{1000 \text{ kg/m}^3} = \mathbf{1.20}$$

$$1.89 \quad V = \frac{w}{\gamma} = \frac{22.0 \text{ N}}{(0.826)(9.81 \text{ kN/m}^3)} \times \frac{1 \text{ kN}}{10^3 \text{ N}} = \mathbf{2.72 \times 10^{-3} \text{ m}^3}$$

$$1.90 \quad \gamma = \rho g = \frac{1080 \text{ kg}}{\text{m}^3} \times \frac{9.81 \text{ m}}{\text{s}^2} \times \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \times \frac{1 \text{ kN}}{10^3 \text{ N}} = \mathbf{10.59 \text{ kN/m}^3}$$

$$\text{sg} = \rho / \rho_w = \frac{1080 \text{ kg/m}^3}{1000 \text{ kg/m}^3} = \mathbf{1.08}$$

$$1.91 \quad \rho = (\text{sg})(\rho_w) = (0.789)(1000 \text{ kg/m}^3) = \mathbf{789 \text{ kg/m}^3}$$

$$\gamma = (\text{sg})(\gamma_w) = (0.789)(9.81 \text{ kN/m}^3) = \mathbf{7.74 \text{ kN/m}^3}$$

- 1.92 $w_o = 35.4 \text{ N} - 2.25 \text{ N} = 33.15 \text{ N}$
 $V_o = Ad = (\pi D^2/4)(d) = \pi(.150 \text{ m})^2(.20 \text{ m})/4 = 3.53 \times 10^{-3} \text{ m}^3$
 $\gamma_o = \frac{w}{V} = \frac{33.15 \text{ N}}{3.53 \times 10^{-3} \text{ m}^3} = 9.38 \times 10^3 \text{ N/m}^3 = \mathbf{9.38 \text{ kN/m}^3}$
 $\text{sg} = \frac{\gamma_o}{\gamma_w} = \frac{9.38 \text{ kN/m}^3}{9.81 \text{ kN/m}^3} = \mathbf{0.956}$
- 1.93 $V = Ad = (\pi D^2/4)(d) = \pi(10 \text{ m})^2(6.75 \text{ m})/4 = 530.1 \text{ m}^3$
 $w = \gamma V = (0.68)(9.81 \text{ kN/m}^3)(530.1 \text{ m}^3) = 3.536 \times 10^3 \text{ kN} = \mathbf{3.536 \text{ MN}}$
 $m = \rho V = (0.68)(1000 \text{ kg/m}^3)(530.1 \text{ m}^3) = 360.5 \times 10^3 \text{ kg} = \mathbf{360.5 \text{ Mg}}$
- 1.94 $w_{\text{castor oil}} = \gamma_{co} \cdot V_{co} = (9.42 \text{ kN/m}^3)(0.02 \text{ m}^3) = 0.1884 \text{ kN}$
 $V_m = \frac{w}{\gamma_m} = \frac{0.1884 \text{ kN}}{(13.54)(9.81 \text{ kN/m}^3)} = \mathbf{1.42 \times 10^{-3} \text{ m}^3}$
- 1.95 $w = \gamma V = (2.32)(9.81 \text{ kN/m}^3)(1.42 \times 10^{-4} \text{ m}^3) = 3.23 \times 10^{-3} \text{ kN} = \mathbf{3.23 \text{ N}}$
- 1.96 $\gamma = (\text{sg})(\gamma_w) = 0.876(62.4 \text{ lb/ft}^3) = \mathbf{54.7 \text{ lb/ft}^3}$
 $\rho = (\text{sg})(\rho_w) = 0.876(1.94 \text{ slugs/ft}^3) = \mathbf{1.70 \text{ slugs/ft}^3}$
- 1.97 $\rho = \frac{\gamma}{g} = \frac{0.0765 \text{ lb/ft}^3}{32.2 \text{ ft/s}^2} \times \frac{1 \text{ slug}}{1 \text{ lb} \cdot \text{s}^2/\text{ft}} = \mathbf{2.38 \times 10^{-3} \text{ slugs/ft}^3}$
- 1.98 $\gamma = \rho g = 0.00381 \text{ slug/ft}^3 (32.2 \text{ ft/s}^2) \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{0.1227 \text{ lb/ft}^3}$
- 1.99 $\text{sg} = \gamma_o/(\gamma_w @ 4^\circ\text{C}) = 56.4 \text{ lb/ft}^3/62.4 \text{ lb/ft}^3 = \mathbf{0.904 \text{ at } 40^\circ\text{F}}$
 $\text{sg} = \gamma_o/(\gamma_w @ 4^\circ\text{C}) = 54.0 \text{ lb/ft}^3/62.4 \text{ lb/ft}^3 = \mathbf{0.865 \text{ at } 120^\circ\text{F}}$
- 1.100 $V = w/\gamma = 500 \text{ lb}/834 \text{ lb/ft}^3 = \mathbf{0.600 \text{ ft}^3}$
- 1.101 $\gamma = \frac{w}{V} = \frac{7.50 \text{ lb}}{1 \text{ gal}} \times \frac{7.48 \text{ gal}}{\text{ft}^3} = \mathbf{56.1 \text{ lb/ft}^3}$
 $\rho = \frac{\gamma}{g} = \frac{56.1 \text{ lb/ft}^3}{32.2 \text{ ft/s}^2} = 1.74 \frac{\text{lb} \cdot \text{s}^2}{\text{ft}^4} = \mathbf{1.74 \text{ slugs/ft}^3}$
 $\text{sg} = \frac{\gamma_o}{\gamma_w @ 4^\circ\text{C}} = \frac{5.61 \text{ lb/ft}^3}{62.4 \text{ lb/ft}^3} = \mathbf{0.899}$
- 1.102 $w = \gamma V = (1.258) \frac{(62.4 \text{ lb})}{\text{ft}^3} (50 \text{ gal}) \frac{(1 \text{ ft}^3)}{7.48 \text{ gal}} = \mathbf{525 \text{ lb}}$
- 1.103 $w = \gamma V = \rho g V = \frac{1.32 \text{ lb} \cdot \text{s}^2}{\text{ft}^4} \times \frac{32.2 \text{ ft}}{\text{s}^2} \times 25.0 \text{ gal} \times \frac{1 \text{ ft}^3}{7.48 \text{ gal}} = \mathbf{142 \text{ lb}}$

$$1.104 \quad \text{sg} = \frac{\rho}{\rho_w} = \frac{1.20 \text{ g}}{\text{cm}^3} \times \frac{\text{m}^3}{1000 \text{ kg}} \times \frac{1 \text{ kg}}{10^3 \text{ g}} \times \frac{(10^2 \text{ cm})^3}{\text{m}^3} = \mathbf{1.20}$$

$$\rho = (\text{sg})(\rho_w) = 1.20(1.94 \text{ slugs/ft}^3) = \mathbf{2.33 \text{ slugs/ft}^3}$$

$$\gamma = (\text{sg})(\gamma_w) = (1.20)(62.4 \text{ lb/ft}^3) = \mathbf{74.9 \text{ lb/ft}^3}$$

$$1.105 \quad V = \frac{w}{\gamma} = \frac{5.0 \text{ lb ft}^3}{(0.826)62.4 \text{ lb}} \times \frac{0.0283 \text{ m}^3}{\text{ft}^3} \times \frac{(10^2 \text{ cm})^3}{\text{m}^3} = \mathbf{2745 \text{ cm}^3}$$

$$1.106 \quad \gamma = (\text{sg})(\gamma_w) = (1.08)(62.4 \text{ lb/ft}^3) = \mathbf{67.4 \text{ lb/ft}^3}$$

$$1.107 \quad \rho = (0.79)(1.94 \text{ slugs/ft}^3) = \mathbf{1.53 \text{ slugs/ft}^3}; \rho = \mathbf{0.79 \text{ g/cm}^3}$$

$$1.108 \quad \gamma_o = \frac{w}{V} = \frac{(7.95 - 0.50) \text{ lb}}{(\pi(6.0 \text{ in})^2/4)(8.0 \text{ in})} \times \frac{1728 \text{ in}^3}{\text{ft}^3} = \mathbf{56.9 \text{ lb/ft}^3}$$

$$\text{sg} = \gamma_o/\gamma_w = 56.9 \text{ lb/ft}^3/62.4 \text{ lb/ft}^3 = \mathbf{0.912}$$

$$1.109 \quad V = A \cdot d = \frac{\pi D^2}{4} \cdot d = \frac{\pi(30 \text{ ft})^2}{4} \times 22 \text{ ft} = 15550 \text{ ft}^3 \times 7.48 \text{ gal/ft}^3 = \mathbf{1.16 \times 10^5 \text{ gal}}$$

$$w = \gamma V = (0.68)(62.4 \text{ lb/ft}^3)(15550 \text{ ft}^3) = \mathbf{6.60 \times 10^5 \text{ lb}}$$



$$1.110 \quad w_{co} = \gamma_{co} V = (59.69 \text{ lb/ft}^3)(5 \text{ gal})(1 \text{ ft}^3/7.48 \text{ gal}) = \mathbf{39.90 \text{ lb}}$$

$$V_m = \frac{w}{\gamma_m} = \frac{39.90 \text{ lb ft}^3}{13.54(62.4 \text{ lb})} \times \frac{7.48 \text{ gal}}{\text{ft}^3} = \mathbf{0.353 \text{ gal}}$$

$$1.111 \quad w = \gamma V = (2.32) \frac{(62.4 \text{ lb})}{\text{ft}^3} (8.64 \text{ in}^3) \frac{(1 \text{ ft}^3)}{1728 \text{ in}^3} = \mathbf{0.724 \text{ lb}}$$

CURVE FIT FOR THE PROPERTIES OF WATER VS. TEMPERATURE
TABLE A.1

Temp.	Sp Wt	Density	Computed Sp Wt	% Diff	Computed Density	% Diff
0	9.81	1000	9.811	0.002	1000.2	0.020
5	9.81	1000	9.812	0.018	1000.2	0.017
10	9.81	1000	9.809	0.012	999.8	-0.015
15	9.81	1000	9.803	-0.017	999.2	-0.075
20	9.79	998	9.794	0.045	998.4	0.039
25	9.78	997	9.783	0.028	997.3	0.029
30	9.77	996	9.769	-0.015	996.0	-0.002
35	9.75	994	9.752	0.022	994.5	0.047
40	9.73	992	9.734	0.037	992.8	0.077
45	9.71	990	9.713	0.032	990.9	0.090
50	9.69	988	9.691	0.007	988.9	0.088
55	9.67	986	9.667	-0.035	986.7	0.072
60	9.65	984	9.641	-0.096	984.4	0.042
65	9.62	981	9.613	-0.070	982.0	0.103
70	9.59	978	9.584	-0.061	979.5	0.154
75	9.56	975	9.553	-0.069	976.9	0.195
80	9.53	971	9.521	-0.097	974.2	0.331
85	9.50	968	9.486	-0.144	971.5	0.357
90	9.47	965	9.450	-0.211	968.6	0.376
95	9.44	962	9.411	-0.302	965.7	0.388
100	9.40	958	9.371	-0.312	962.8	0.500

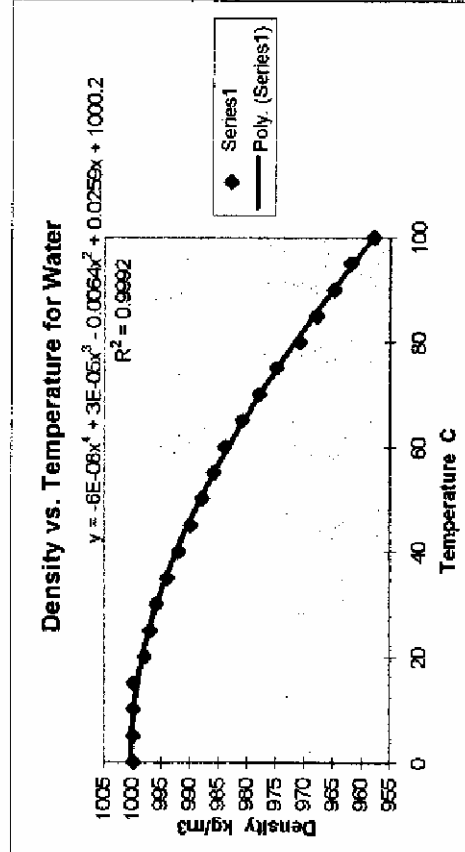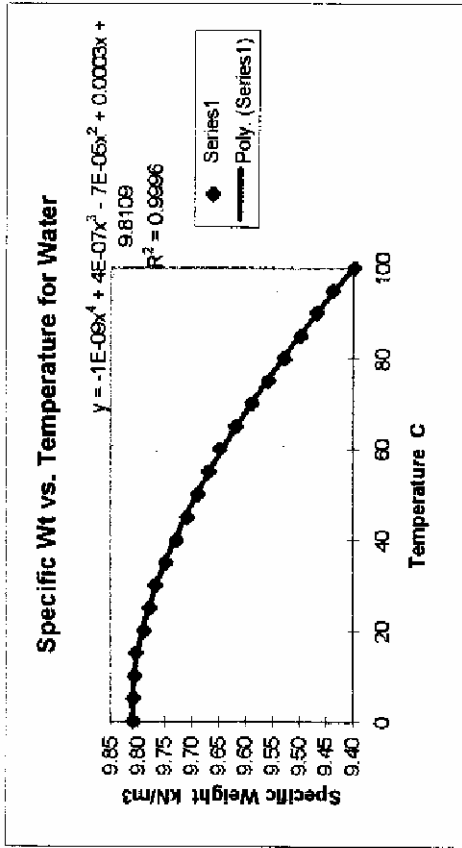

Computer Assignment 2: Sample Output - Equations for Specific Weight and Density versus Temperature are shown within the plots of the output.

$$1.112 \quad \text{Tank Size} = 75 \text{ People} \times \frac{1.7 \text{ gal per person}}{1 \text{ day}} \times 3 \text{ days} \times \frac{1 \text{ ft}^3}{7.48 \text{ gal}} = \underline{51.1 \text{ ft}^3}$$

$$1.113 \quad \text{Required Volume} = 85 \text{ Gallons} \times \frac{1 \text{ ft}^3}{7.48 \text{ gal}} \times \frac{12^3 \text{ in}^3}{1^3 \text{ ft}^3} = 19,636 \text{ in}^3$$

$$\text{Tank Volume} = 19,636 \text{ in}^3 = \frac{\pi \times (D)^2 \times (h)}{4} = \frac{\pi \times (38 \text{ in})^2 \times (h)}{4}$$

$$\text{Required Height} = \frac{19,636 \text{ in}^3 \times 4}{\pi \times (38 \text{ in})^2} = \underline{17.3 \text{ in}}$$

$$1.114 \quad \text{Flow Rate} = \frac{80 \text{ N}}{5 \text{ s}} \times \frac{60 \text{ s}}{1 \text{ min}} = \underline{960 \frac{\text{N}}{\text{min}}}$$

$$1.115 \quad V_{\text{REQ.}} = 1.5 \text{ m} \times 2.5 \text{ m} \times 25 \text{ cm} \times \frac{1 \text{ m}}{100 \text{ cm}} = 0.938 \text{ m}^3$$

$$\text{Time Required} = \frac{1 \text{ min}}{60 \text{ L}} \times \frac{1 \text{ L}}{0.001 \text{ m}^3} \times 0.938 \text{ m}^3 = \underline{15.6 \text{ min}}$$

$$1.116 \quad \text{Flow Rate} = \frac{\text{Volume}}{\text{Time}} = \frac{\left(\frac{\pi \times (24 \text{ in})^2}{4} \times 18 \text{ in} \times \frac{1.0 \text{ gal}}{231 \text{ in}^3} \right)}{\left(90 \text{ s} \times \frac{1 \text{ min}}{60 \text{ s}} \right)} = \underline{23.5 \frac{\text{gal}}{\text{min}}}$$

$$1.117 \quad \$17,000 = 7500 \frac{\$}{\text{year}} \times X \text{ years}$$

$$X = \frac{\$17,000}{7500 \frac{\$}{\text{year}}} = \underline{2.27 \text{ years}}$$

$$1.118 \quad \text{Annual Cost} = 2 \text{ HP} \times \frac{0.746 \text{ kW}}{1 \text{ HP}} \times 1 \text{ year} \times \frac{365 \text{ days}}{1 \text{ year}} \times \frac{24 \text{ hr}}{1 \text{ day}} \times \frac{\$0.10}{\text{kW} - \text{HR}} = \underline{\$1,307/\text{Year}}$$

$$1.119 \quad \text{Displacement} = \frac{\pi \times 7.5 \text{ cm}^2 \times 10.0 \text{ cm}}{4} \times \frac{0.001 \text{ L}}{1 \text{ cm}^3} = \underline{0.442 \text{ L}}$$

$$1.120 \quad \text{Flow Rate} = \frac{2.2 \text{ L}}{1 \text{ rev}} \times \frac{80 \text{ rev}}{1 \text{ min}} \times \frac{1 \text{ m}^3}{1000 \text{ L}} \times \frac{60 \text{ min}}{1 \text{ hr}} = \underline{10.6 \frac{\text{m}^3}{\text{hr}}}$$

$$1.121 \quad \text{Volume} = \frac{\pi \times 1 \text{ in}^2 \times 2.5 \text{ in}}{4} = \underline{1.963 \frac{\text{in}^3}{\text{rev}}}$$

$$20 \frac{\text{gal}}{\text{min}} = \frac{1.963 \text{ in}^3}{1 \text{ rev}} \times \frac{1 \text{ gal}}{231 \text{ in}^3} \times \frac{X \text{ rev}}{\text{min}}$$

$$X = \frac{20 \frac{\text{gal}}{\text{min}}}{\frac{1.963 \text{ in}^3}{1 \text{ rev}} \times \frac{1 \text{ gal}}{231 \text{ in}^3}} = \underline{2,354 \text{ RPM}}$$