

SOLUTIONS MANUAL FOR  
**ENGINEERING VIBRATIONS**  
**SECOND EDITION**

\_\_\_\_\_ by \_\_\_\_\_

**WILLIAM J. BOTTEGA**  
**JOSEPH M. LAKAWICZ**  
**MICHAEL J. PAVLOU**





# SOLUTIONS MANUAL FOR ENGINEERING VIBRATIONS SECOND EDITION

\_\_\_\_\_ by \_\_\_\_\_

WILLIAM J. BOTTEGA  
JOSEPH M. LAKAWICZ  
MICHAEL J. PAVLOU



CRC Press

Taylor & Francis Group  
Boca Raton London New York

CRC Press is an imprint of the  
Taylor & Francis Group, an **informa** business

CRC Press  
Taylor & Francis Group  
6000 Broken Sound Parkway NW, Suite 300  
Boca Raton, FL 33487-2742

© 2013 by Taylor & Francis Group, LLC  
CRC Press is an imprint of Taylor & Francis Group, an Informa business

No claim to original U.S. Government works

Printed on acid-free paper  
Version Date: 20160317

International Standard Book Number-13: 978-1-4822-0041-6 (Ancillary)

This book contains information obtained from authentic and highly regarded sources. Reasonable efforts have been made to publish reliable data and information, but the author and publisher cannot assume responsibility for the validity of all materials or the consequences of their use. The authors and publishers have attempted to trace the copyright holders of all material reproduced in this publication and apologize to copyright holders if permission to publish in this form has not been obtained. If any copyright material has not been acknowledged please write and let us know so we may rectify in any future reprint.

Except as permitted under U.S. Copyright Law, no part of this book may be reprinted, reproduced, transmitted, or utilized in any form by any electronic, mechanical, or other means, now known or hereafter invented, including photocopying, microfilming, and recording, or in any information storage or retrieval system, without written permission from the publishers.

For permission to photocopy or use material electronically from this work, please access [www.copyright.com](http://www.copyright.com) (<http://www.copyright.com/>) or contact the Copyright Clearance Center, Inc. (CCC), 222 Rosewood Drive, Danvers, MA 01923, 978-750-8400. CCC is a not-for-profit organization that provides licenses and registration for a variety of users. For organizations that have been granted a photocopy license by the CCC, a separate system of payment has been arranged.

**Trademark Notice:** Product or corporate names may be trademarks or registered trademarks, and are used only for identification and explanation without intent to infringe.

**Visit the Taylor & Francis Web site at**  
**<http://www.taylorandfrancis.com>**

**and the CRC Press Web site at**  
**<http://www.crcpress.com>**

---

# Contents

CHAPTER 1 ..... 1

CHAPTER 2 ..... 9

CHAPTER 3 ..... 25

CHAPTER 4 ..... 39

CHAPTER 5 ..... 47

CHAPTER 6 ..... 51

CHAPTER 7 ..... 81

CHAPTER 8 ..... 127

CHAPTER 9 ..... 171

CHAPTER 10 ..... 187

CHAPTER 11 ..... 229

CHAPTER 12 ..... 255


CHAPTER 13 ..... 265

CHAPTER 14 ..... 313




# Chapter 1

- 1.1) 3 degrees of freedom




- 1.2) 2 degrees of freedom




- 1.3) 1 degree of freedom

if  $\theta$  is known, then  $\phi$  and  $x$  are known

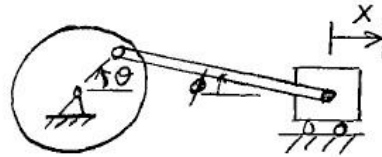

- 1.4)  $\Delta = \frac{1}{2}$ " ,  $W = 200$ lb

$$k = \frac{W}{\Delta} = \frac{200 \text{ lb}}{\frac{1}{2} \text{ in}} = 400 \text{ lb/in}$$



From Eq. (1.14),  $k_{\text{eff}} = \frac{3EI}{L^3}$ ,  $I = \frac{4 \cdot 2^3}{12} = \frac{8}{3} \text{ in}^4$


$$E = \frac{kL^3}{3I} = \frac{400(10 \times 12)^3}{3(\frac{8}{3})} = 8.64 \times 10^7 \text{ psi}$$

- 1.5)  $k = \frac{W}{\Delta} = \frac{200 \text{ lb}}{\frac{1}{2} \text{ in}} = 400 \text{ lb/in}$ ,  $I = \frac{4 \cdot 2^3}{12} = \frac{8}{3} \text{ in}^4$

From Eq. (1.22),  $k_{\text{eff}} = \frac{6EI}{L^3}$  where  $L = \text{half length}$

$$E = \frac{kL^3}{6I} = \frac{400(5 \times 12)^3}{6(\frac{8}{3})} = 5.40 \times 10^6 \text{ psi}$$

$$\begin{aligned}
 1.6) \quad & w(0) = 0 \\
 & w'(0) = 0 \\
 & EIw'''(L) = -P \\
 & w'(L) = 0
 \end{aligned}$$



$$\begin{aligned}
 & w^{(iv)}(x) = 0 \\
 & w'''(x) = c_0 \\
 & w''(x) = c_0x + c_1 \\
 & w'(x) = c_0 \frac{x^2}{2} + c_1x + c_2
 \end{aligned}$$

$$w(x) = c_0 \frac{x^3}{6} + c_1 \frac{x^2}{2} + c_2x + c_3 \quad (1)$$

$$\begin{aligned}
 w(0) = 0 & \Rightarrow c_3 = 0 \\
 w'(0) = 0 & \Rightarrow c_2 = 0
 \end{aligned} \quad (2a,b)$$

$$w'''(L) = -\frac{P}{EI} = c_0 \quad (2c,d)$$

$$w'(L) = 0 \Rightarrow c_1 = -c_0L/2 = \frac{PL}{2EI}$$

$$(2a,b,c,d) \text{ into } (1) \Rightarrow w(x) = \frac{Px^2}{12EI} [3L - 2x]$$

$$\Delta_L = w(L) = \frac{PL^3}{12EI}, \text{ thus } P = \frac{12EI}{L^3} \Delta_L \text{ or } P = k\Delta_L \text{ where}$$

$$k = \frac{12EI}{L^3}$$

$$1.7) \quad \text{From Eq. (1.40): } k = \rho_f g A = \gamma_f A = 62.4 \frac{\text{lb}}{\text{ft}^3} (6' \times 6') = 2.25 \times 10^3 \text{ lb/ft}$$

$$\Delta = \frac{W}{k} = \frac{190}{2.25 \times 10^3} = 0.0844 \text{ ft} = 1.01 \text{ in}$$

$$1.8) \quad \frac{1}{k_{eq}} = \frac{1}{k_1 + k_2} + \frac{1}{k_3} = \frac{k_1 + k_2 + k_3}{(k_1 + k_2)k_3}$$


$$k_{eq} = \frac{(k_1 + k_2)k_3}{k_1 + k_2 + k_3}$$



$$1.9) \quad \frac{1}{k^*} = \frac{1}{k_1} + \frac{1}{k_2} \Rightarrow k^* = \frac{k_1 k_2}{k_1 + k_2}$$

$$k_{eq} = k^* + k_3 = \frac{k_1 k_2}{k_1 + k_2} + k_3$$

1.10)



$$\frac{1}{k_{eff}} = \frac{1}{k_1} + \frac{1}{k_2} \Rightarrow k_{eff} = \frac{k_1 k_2}{k_1 + k_2} \quad \text{where, from Eq. (1.8), } k_1 = \frac{E_1 A_1}{L_1}, k_2 = \frac{E_2 A_2}{L_2}$$

$$E_{steel} = 29 \times 10^6 \text{ psi} = 20 \times 10^6 \text{ N/cm}^2$$

$$E_{alum} = 10 \times 10^6 \text{ psi} = 6.9 \times 10^6 \text{ N/cm}^2$$

$$k_1 = \frac{20 \times 10^6 \cdot \pi(3)^2}{3 \times 100} = 18.8 \times 10^5 \text{ N/cm}$$

$$k_2 = \frac{6.9 \times 10^6 \cdot \pi(2)^2}{2 \times 100} = 4.34 \times 10^5 \text{ N/cm}$$

$$k_{eff} = \frac{(18.8 \times 10^5)(4.34 \times 10^5)}{(18.8 + 4.34) \times 10^5} = 3.53 \times 10^5 \text{ N/cm}$$

$$\Delta = \frac{P}{k_{eff}} = \frac{10 \text{ N}}{3.53 \times 10^5 \text{ N/cm}} = 2.83 \times 10^{-5} \text{ cm}$$

$$1.11) \quad G_{steel} = 12 \times 10^6 \text{ psi} = 8.28 \times 10^6 \text{ N/cm}^2$$

$$G_{alum} = 4 \times 10^6 \text{ psi} = 2.76 \times 10^6 \text{ N/cm}^2$$

$$J_1 = \frac{\pi R_1^4}{2} = \frac{\pi(3)^4}{2} = 127 \text{ cm}^4$$

$$J_2 = \frac{\pi R_2^4}{2} = \frac{\pi(2)^4}{2} = 25.1 \text{ cm}^4$$

From Eq. (1.32):


$$k_1 = \frac{G_1 J_1}{L_1} = \frac{8.28 \times 10^6 \cdot 127}{3 \times 100} = 3.51 \times 10^4 \text{ N} \cdot \text{m/rad}$$

$$k_2 = \frac{G_2 J_2}{L_2} = \frac{2.76 \times 10^6 \cdot 25.1}{2 \times 100} = 0.346 \times 10^4 \text{ N} \cdot \text{m/rad}$$

$$\frac{1}{k^*} = \frac{1}{3.51 \times 10^4} + \frac{1}{0.346 \times 10^4} = 3.18 \times 10^{-4} \Rightarrow k^* = 3140 \text{ N} \cdot \text{m/rad}$$

$$\theta = \frac{T}{k^*} = \frac{200 \text{ N} \cdot \text{m}}{3140 \text{ N} \cdot \text{m/rad}} = 0.0637 \text{ rad}$$


1.12)

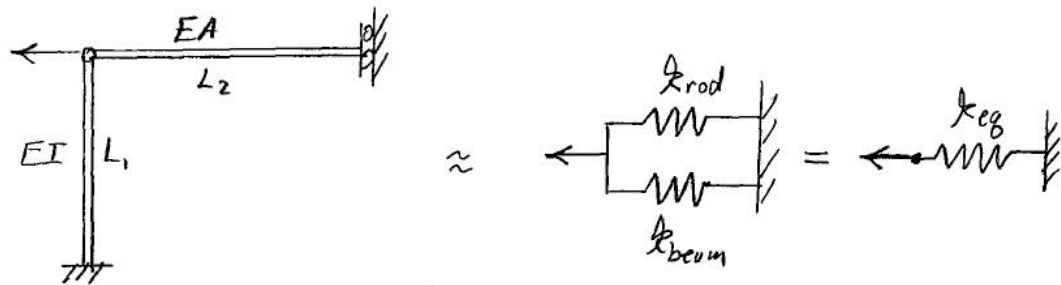

Thus, from Eqs. (1.44), (1.8), and (1.14):

$$k_{eq} = k_{rod} + k_{beam} = \frac{EA}{L_2} + \frac{3EI}{L_1^3}$$

1.13)

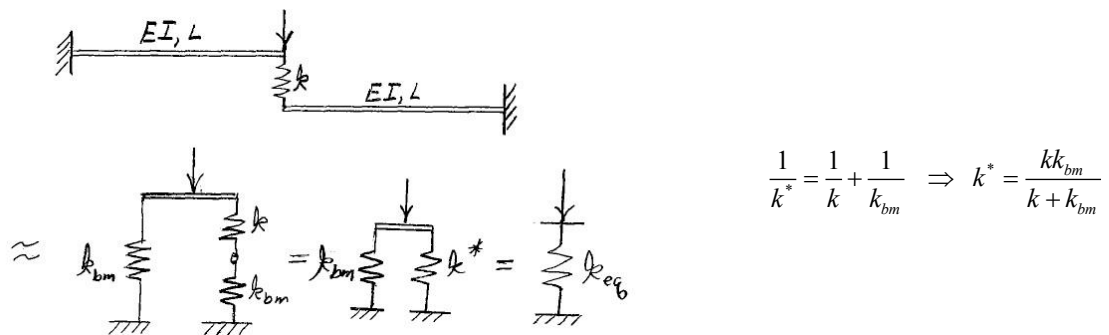


$$\frac{1}{k^*} = \frac{1}{k} + \frac{1}{k_{bm}} \Rightarrow k^* = \frac{kk_{bm}}{k + k_{bm}}$$

$$k_{eq} = k^* + k_{bm} = \frac{kk_{bm}}{k + k_{bm}} + k_{bm} = k_{bm} \left[ \frac{k}{k + k_{bm}} + 1 \right]$$

$$k_{eq} = \frac{3EI}{L^3} \left[ \frac{k}{k + \frac{3EI}{L^3}} + 1 \right]$$

1.14)

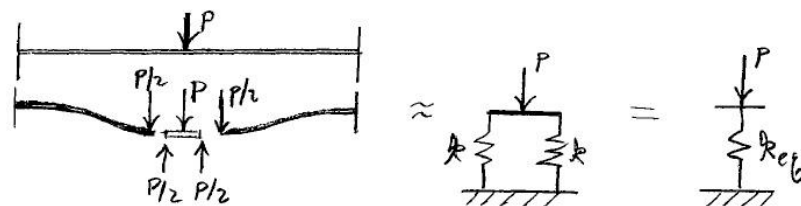

From Eq. (1.17) or Prob. 1.6


$$k = \frac{12EI}{(L/2)^3} = \frac{96EI}{L^3}$$

$$k_{eq} = k + k = 2 \times \frac{96EI}{L^3} = 192 \frac{EI}{L^3}$$

1.15) From Eq. (1.40)  $k = \rho_f g A$

For seawater,  $\gamma = \rho_f g = 64 \text{ lb/ft}^3$


Hence, from Eq. (1.44):  $k_{eq} = 4k = 4\gamma A = 4(64)\pi(2)^2 = 3220 \text{ lb/ft}$

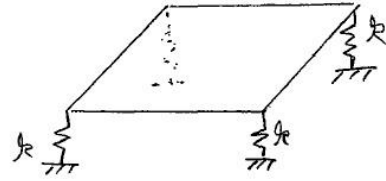

$$\Delta = \frac{W}{k_{eq}} = \frac{125}{3220} = 0.0373 \text{ ft} = 0.447 \text{ in}$$

1.16)

$$\frac{1}{k^*} = \frac{1}{k_{rod}} + \frac{1}{k} \Rightarrow k^* = \frac{k k_{rod}}{k + k_{rod}}$$

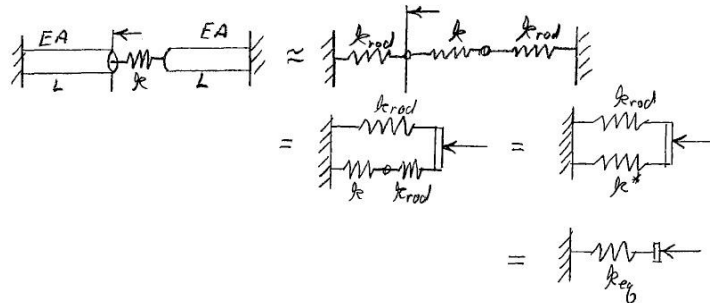

$$k_{eq} = k^* + k_{rod} = k_{rod} \left[ \frac{k}{k + k_{rod}} + 1 \right] = \frac{EA}{L} \left[ \frac{kL}{kL + EA} + 1 \right]$$

1.17) Same as Prob. 1.16 with linear springs replaced by torsional springs, and  $k_{rod} = \frac{GJ}{L}$

$$k_{eq} = k_{rod} \left[ \frac{k_T}{k_T + k_{rod}} + 1 \right] = \frac{GJ}{L} \left[ \frac{k_T L}{k_T L + GJ} + 1 \right]$$

1.18) Neglect rotation of block and


hence, twisting of beams

From Eq. (1.17),

$$k_{bm} = 12EI / L^3$$

From Eq. (1.44),

$$k_{eq} = 3k_{bm} = 3 \cdot 12 \frac{EI}{L^3} = 36 \frac{EI}{L^3}$$

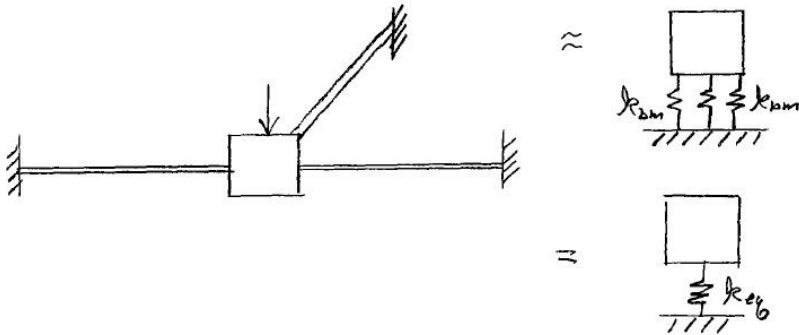

$$1.19) \quad \text{From Eq. (1.61)} \quad \begin{aligned} e^{i\psi} &= \cos \psi + i \sin \psi \\ e^{-i\psi} &= \cos \psi - i \sin \psi \end{aligned}$$

$$e^{i\psi} + e^{-i\psi} = 2 \cos \psi \Rightarrow \quad \cos \psi = \frac{e^{i\psi} + e^{-i\psi}}{2}$$

$$e^{i\psi} - e^{-i\psi} = 2i \sin \psi \Rightarrow \quad \sin \psi = \frac{e^{i\psi} - e^{-i\psi}}{2i}$$


---

$$1.20) \quad \text{From Eq. (1.63)} \quad \begin{aligned} e^{\psi} &= \cosh \psi + \sinh \psi \\ e^{-\psi} &= \cosh \psi - \sinh \psi \end{aligned}$$

$$e^{\psi} + e^{-\psi} = 2 \cosh \psi \Rightarrow \quad \cosh \psi = \frac{e^{\psi} + e^{-\psi}}{2}$$

$$e^{\psi} - e^{-\psi} = 2 \sinh \psi \Rightarrow \quad \sinh \psi = \frac{e^{\psi} - e^{-\psi}}{2}$$


---

$$1.21) \quad f(\theta) = \frac{1}{2}(a+ib)e^{i\theta} + \frac{1}{2}(a-ib)e^{-i\theta}$$

Expanding and regrouping terms

$$\begin{aligned} f(\theta) &= \frac{1}{2}ae^{i\theta} + \frac{1}{2}ibe^{i\theta} + \frac{1}{2}ae^{-i\theta} - \frac{1}{2}ibe^{-i\theta} \\ &= \frac{1}{2}a(e^{i\theta} + e^{-i\theta}) + \frac{1}{2}ib(e^{i\theta} - e^{-i\theta}) \cdot \frac{i}{i} \\ &= a \frac{e^{i\theta} + e^{-i\theta}}{2} - b \frac{e^{i\theta} - e^{-i\theta}}{2i} \end{aligned}$$

$$\text{From Prob. 1.19} \quad \cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2} \quad \text{and} \quad \sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$$

Thus,  $f(\theta) = a \cos \theta - b \sin \theta$  or  $f(\theta) = c_1 \cos \theta + c_2 \sin \theta$  where

$$\underline{c_1 = a} \quad \text{and} \quad \underline{c_2 = -b}$$


---

$$1.22) \quad z = \frac{a+ib}{c+id} \cdot \frac{c-id}{c-id} = \frac{(ac+bd) + i(bc-ad)}{c^2+d^2}$$

$$\text{Thus,} \quad \underline{\text{Re}(z) = \frac{ac+bd}{c^2+d^2}} \quad \text{and} \quad \underline{\text{Im}(z) = \frac{bc-ad}{c^2+d^2}}$$


---

$$1.23) \quad W = \int \vec{F} \cdot d\vec{r}$$

$$(a) \quad W_{AC} = \int_0^L -ks \, ds = -\frac{ks^2}{2} \Big|_0^L = -\frac{kL^2}{2}$$

$$\underline{\underline{W_{AC} = -\frac{k}{2}(a^2 + b^2)}}$$

$$(b) \quad W_{AB} = \int_0^a -kx \, dx = -\frac{ka^2}{2}$$

$$W_{BC} = \int -kL \bar{e}_L \cdot \bar{j} \, dy = \int -kL \sin \theta \, dy = -kL \int_0^b \frac{y}{L} \, dy = -\frac{kb^2}{2}$$

$$W_{ABC} = W_{AB} + W_{BC} = -\frac{ka^2}{2} - \frac{kb^2}{2}$$

$$\underline{\underline{W_{ABC} = -\frac{k}{2}(a^2 + b^2)}}$$

Comparison of (a) and (b) shows that  $W_{AC} = W_{ABC}$  as it should be since the elastic force is conservative.

---

$$1.24) \quad f = -\mu N = -\mu W$$

$$(a) \quad W_{A \rightarrow B} = \int_A^B -\mu W \, dx = -\mu W \overline{AB} = -\mu WL_1$$

$$W_{B \rightarrow A} = \int_B^A \mu W \, (-dx) = -\mu W \overline{BA} = -\mu WL_1$$

$$\underline{\underline{W_{A \rightarrow B \rightarrow A} = -\mu WL_1 - \mu WL_1 = -2\mu WL_1 \neq 0}}$$

(b)

$$\begin{aligned} W_{A \rightarrow B \rightarrow C \rightarrow D \rightarrow A} &= -\mu W \overline{AB} - \mu W \overline{BC} - \mu W \overline{CD} - \mu W \overline{DA} \\ &= -\mu W L_1 - \mu W L_2 - \mu W L_1 - \mu W L_2 \end{aligned}$$

$$\underline{\underline{W_{A \rightarrow B \rightarrow C \rightarrow D \rightarrow A} = -2\mu W(L_1 + L_2) \neq 0}}$$

The work done is clearly dependent on the path traversed. Hence, the friction force is non-conservative.

---

1.25) -Since there are no dissipative forces acting on the rod, energy is conserved.


-Since the spring is not torqued when  $\theta=0$ , let us choose this configuration as our datum to measure potential energy.

Then,  $[KE + PE]_{\theta=0} = [KE + PE]_{\theta=\theta_0}$

$$\frac{1}{2}mv^2 + 0 = 0 + \frac{1}{2}k_T\theta_0^2 - mgL(1 - \cos\theta_0)$$


Solving for  $v$ :

$$v = \sqrt{\frac{k_T}{m}\theta_0^2 - 2gL(1 - \cos\theta_0)}$$

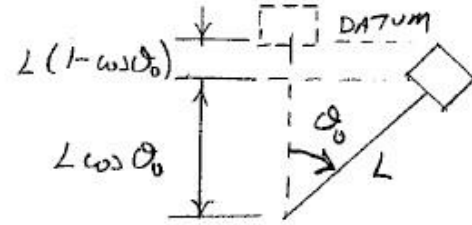

1.26) (a)  $\sum F = ma :$

$$F - kx - c\dot{x} = m\ddot{x}$$



$$\underline{m\ddot{x} + c\dot{x} + kx = F}$$

(b)  $W^{(NC)} = \Delta T + \Delta U$

$$\int (F - c\dot{x}) dx = \left[ \frac{1}{2}m\dot{x}^2 - \frac{1}{2}mv_0^2 \right] + \left[ \frac{1}{2}kx^2 - 0 \right] \text{ where } dx = \frac{dx}{dt} = \dot{x}dt$$

$$\int (F - c\dot{x}) \dot{x} dt = \frac{1}{2}m\dot{x}^2 - \frac{1}{2}mv_0^2 + \frac{1}{2}kx^2 \text{ take derivative } \frac{d}{dt}$$

$$(F - c\dot{x})\dot{x} = m\ddot{x}\dot{x} + kx\dot{x} \text{ or } (m\ddot{x} + c\dot{x} + kx - F)\dot{x} = 0 \text{ thus, for } \dot{x} \neq 0$$

$$\underline{m\ddot{x} + c\dot{x} + kx = F}$$

1.27) Though a friction force is present to prevent slip, it acts only at the instantaneous stationary contact point. (Since the wheel is treated as rigid, contact with the road occurs at only one point of the wheel.) Since the point, and hence the force, does not move, the friction force does no work. Therefore, energy is conserved for this idealized rigid body model.

$$\frac{1}{2}mv_{G_2}^2 + \frac{1}{2}I\omega_2^2 + 0 = 0 + 0 + mgh$$

no slip:  $v_G = \omega R$ , noting that  $I = mr_G^2$

$$\frac{1}{2}m(\omega_2 R)^2 + \frac{1}{2}mr_G^2\omega_2^2 = mgh \text{ solving for } \omega_2 : \omega_2 = \sqrt{\frac{2gh}{R^2 + r_G^2}}$$

$$\underline{v_{G_2} = \omega_2 R = R\sqrt{\frac{2gh}{R^2 + r_G^2}}}$$

## Chapter 2

$$2.1) \quad T = 2 \text{ sec}, \quad m = 20 \text{ gm} \quad \frac{k}{m} = \omega^2 = \left(\frac{2\pi}{T}\right)^2 = \left(\frac{2\pi}{2}\right)^2 = \pi^2$$


$$\underline{k = \pi^2 m = \pi^2 (20) = 197.4 \text{ dynes/cm}}$$

$$2.2) \quad m = \frac{k}{\omega^2}$$

$$m_{p1} + m_{pkg} = \frac{k}{\omega^2}$$

$$m_{pkg} = \frac{k}{\omega^2} - m_{p1}$$

$$W_{pkg} = m_{pkg} g = \frac{kg}{\omega^2} - m_{p1} g = \frac{kg}{(2\pi\nu)^2} - W_{p1}$$




$$W_{pkg} = \frac{50(32.2 \times 12)}{[2\pi(3)]^2} - 10 = 44.4 \text{ lb}$$

$$2.3) \quad \text{Fig. 1.8} \quad \omega = \sqrt{\frac{k_{eff}}{m}} = \sqrt{\frac{12EI}{mL^2}} = 2\sqrt{\frac{3EI}{mL^2}}$$

$$\text{Fig. 1.9} \quad \omega = \sqrt{\frac{k_{eff}}{m}} = \sqrt{\frac{48EI}{mL^2}} = 4\sqrt{\frac{3EI}{mL^2}}$$

The effect of clamping the roof is to increase the stiffness and, in doing so, double the natural frequency of the structure.

$$2.4) \quad \omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{6}{4}} = 1.225 \text{ rad/sec}$$




$$x_0 = 2 \text{ m} \\ v_0 = 4 \text{ m/sec}$$

From Eq. (2.16):

$$\underline{A = \sqrt{x_0^2 + (v_0/\omega)^2} = \sqrt{(2)^2 + (4/1.225)^2} = 3.830 \text{ m}}$$



From Eq. (2.17):

$$\underline{\phi = \tan^{-1}\left(\frac{v_0}{\omega x_0}\right) = \tan^{-1}\left(\frac{4}{1.225(2)}\right) = 58.51^\circ = 1.021 \text{ rads}}$$

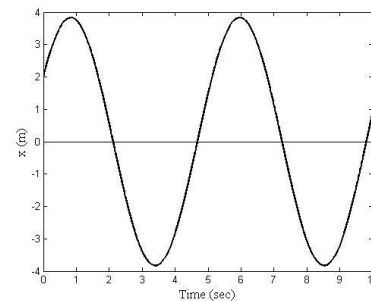

$$\text{From Eq. (2.15):} \quad \underline{x(t) = 3.830 \cos(1.225t - 1.021) \text{ meters}}$$

$$2.5) \quad \omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{4}{2}} = \sqrt{2} \text{ rad/sec}$$

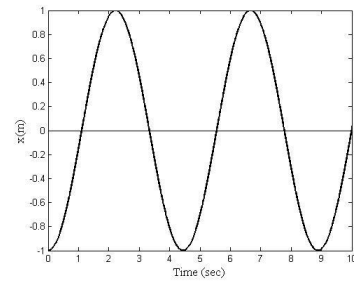

$$A = 1 \text{ m}, \quad \phi = \pi \text{ rads}$$

From Eq. (2.14):  $x(t) = \cos(\sqrt{2}t - \pi) = -\cos(\sqrt{2}t) \text{ meters}$

$$2.6) \quad A = \pi R^2 = \pi (1.25)^2 = 4.91 \text{ cm}^2, \quad E_{al} = 6.90 \times 10^6 \text{ N/cm}^2, \quad m = 20 \text{ kg} = 2 \times 10^4 \text{ g}$$

$$k_{eq} = \frac{E_{al} A}{L} = \frac{(6.90 \times 10^6)(4.91)}{30} = 1.13 \times 10^6 \text{ N/cm} = 1.13 \times 10^{11} \text{ dynes/cm}$$

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{1.13 \times 10^{11}}{2 \times 10^4}} = 2380 \text{ rad/sec} = 378 \text{ cps}$$


$$2.7) \quad I_p = m r_G^2 = 20(5)^2 = 500 \text{ kg} \cdot \text{cm}^2 = 5 \times 10^5 \text{ g} \cdot \text{cm}^2$$

$$J = \frac{\pi R^4}{2} = \frac{\pi (1.25)^4}{2} = 3.83 \text{ cm}^4$$

From Eq. (1.29):  $k_T = \frac{JG}{L} = \frac{(2.76 \times 10^6)(3.83)}{30} = 3.52 \times 10^5 \text{ N} \cdot \text{cm/rad} = 3.52 \times 10^{10} \text{ dyne} \cdot \text{cm/rad}$


$$\omega = \sqrt{\frac{k_T}{I_p}} = \sqrt{\frac{3.52 \times 10^{10}}{5 \times 10^5}} = 265 \text{ rad/sec}$$

- 2.9) If we treat the fluid as incompressible, we may think of the confined fluid as an incompressible/inextensible rod with vanishing bending stress. We may then recognize that the components of displacement, velocity, and acceleration along the path of the fluid are uniform. That is, they are the same for each fluid particle. Let us isolate a typical fluid element, (1) moving vertically and (2) moving horizontally, and draw the kinetic diagrams for each. Hence,

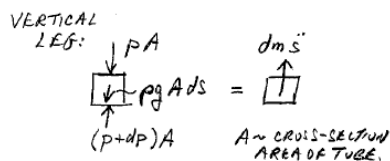

$$A dp - \rho g A ds = \ddot{s} dm$$

HORIZONTAL LEG:



$$A dp = \ddot{s} dm$$




$$\int_A^0 A dp - \int_A^0 \rho g A ds = \int_A^0 \ddot{s} dm \quad (1a)$$

$$\int_{0'}^{A'} A dp - \int_{0'}^{A'} \rho g A ds = \int_{0'}^{A'} \ddot{s} dm \quad (1b)$$

$$\int_{A'}^B A dp - \int_{A'}^B \rho g A ds = \int_{A'}^B \ddot{s} dm \quad (1c)$$

$$\int_0^{0'} A dp = \int_0^{0'} \ddot{s} dm \quad (1d)$$

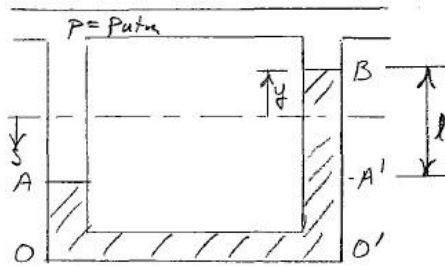

Adding (1a)-(1d) and recognizing that  $\int_A^0 = -\int_{0'}^A$  gives

$$A \int_0^{0'} dp + A \int_{A'}^B dp - \int_{A'}^B \rho g A ds = \ddot{s} \int_A^B dm$$

$$A(p_0 - p_0) + A(p_B - p_A) - \rho g A l = m \ddot{s} \quad (2)$$

where  $m = \int_A^B dm = \rho A L$  and  $L$  is the total given length of the manometer fluid. Let  $y$  measure the height of manometer fluid above its equilibrium position. Then, since acceleration of all particles along the path is the same,  $\ddot{s} = \ddot{y}$  and further,  $l = 2y$  then substituting into (2):

$$-2\rho g A y = \rho A L \ddot{y}$$

or

$$\ddot{y} + \frac{2g}{L} y = 0$$

Thus,

$$\omega = \sqrt{\frac{2g}{L}}$$

2.10)  $k = 400 \text{ lb/in}$ ,  $W = 200 \text{ lb}$


$$\omega = \sqrt{\frac{k}{W/g}} = \sqrt{\frac{400}{200/32.2 \times 12}} = 27.8 \text{ rad/sec}$$

$$T = \frac{2\pi}{27.8} = 0.226 \text{ sec}$$

From Eq. (2.14):  $x(t) = x_0 \cos \omega t + \frac{v_0}{\omega} \sin \omega t$

$$x(t) = (1) \cos 27.8t + \frac{0}{27.8} \sin 27.8t$$

$$\underline{x(t) = \cos 27.8t \text{ inches}}$$

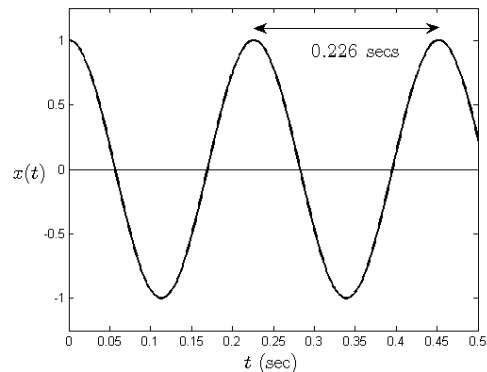


2.11)  $x_0 = 1 \text{ in}$ ,  $v_0 = 13.9 \text{ in/sec}$ ,  $\omega = 27.8 \text{ rad/sec}$ ,  $T = \frac{2\pi}{27.8} = 0.226 \text{ sec}$

$$A = \sqrt{(1)^2 + (13.9/27.8)^2} = 1.12 \text{ in}$$

$$\phi = \tan^{-1} \left( \frac{13.9}{27.8(1)} \right) = 0.464 \text{ rads}$$

$$t_\phi = \phi/\omega = 0.0167 \text{ sec}$$

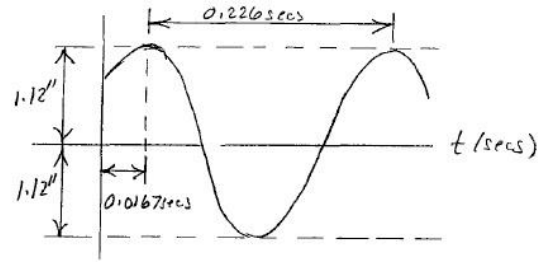


$$\underline{x(t) = 1.12 \cos(27.8t - 0.464) \text{ inches}}$$

2.12) From Prob. 1.6:

$$k = \frac{12EI}{L^3} = 3 \cdot \frac{4EI}{L^3} = 4(400 \text{ lb/in}) = 1600 \text{ lb/in}$$

$$\omega = \sqrt{\frac{k}{W/g}} = \sqrt{\frac{1600}{200/32.2 \times 12}} = 55.6 \text{ rad/sec}$$

$$T = \frac{2\pi}{55.6} = 0.113 \text{ sec}$$

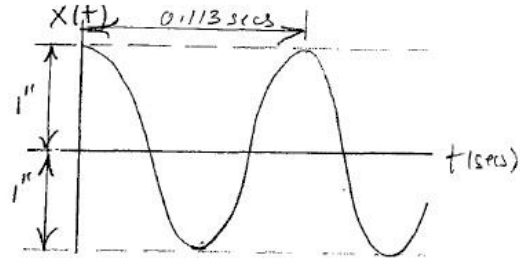

$$\underline{x(t) = \cos 55.6t \text{ inches}}$$

2.13) The spring force is non-impulsive. Conservation of linear momentum:

$$m \cdot 0 + mv_1 = 2mv_2 \Rightarrow v_2 = \frac{1}{2}v_1$$

Thus, the initial velocity for 2-car system is  $v_0 = \frac{1}{2}v_1$

$$k_{eq} = \frac{4EA}{L} = \frac{4\pi R^2 E}{L}$$

$$\omega = \sqrt{\frac{k_{eq}}{2m}} = \sqrt{\frac{4\pi R^2 E}{2mL}} = \sqrt{\frac{2\pi R^2 E}{mL}}$$

$$x(t) = x_0 \cos \omega t + \frac{v_0}{\omega} \sin \omega t$$

$$x_0 = 0, \frac{v_0}{\omega} = \frac{\frac{1}{2}v_1}{\sqrt{2\pi R^2 E/mL}} = \frac{v_1}{2R} \sqrt{\frac{mL}{2\pi E}}$$

$$\underline{x(t) = \frac{v_1}{2R} \sqrt{\frac{mL}{2\pi E}} \sin \sqrt{\frac{2\pi R^2 E}{mL}} t}$$

2.14) From Prob. 1.7:  $k = 2.25 \times 10^3$  lb/ft

$$x_0 = 1.01 \text{ in}, \quad v_0 = 0$$

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{2.25 \times 10^3}{200/32.2}} = 19.0 \text{ rad/sec}$$

$$\underline{\underline{x(t) = 1.01 \cos 19t \text{ inches}}}$$

2.15) From Prob. 1.15:  $k = 3220$  lb/ft

$$x_0 = 0.447 \text{ in}, \quad v_0 = 0$$


$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{3220}{200/32.2}} = 22.8 \text{ rad/sec}$$

$$\underline{\underline{x(t) = 0.447 \cos 22.8t \text{ inches}}}$$

2.16)  $\sum M_G = I_G \ddot{\theta}$

$$-lF_{\text{buoy}} \sin \theta = I_G \ddot{\theta}$$

$$I_G \ddot{\theta} + lF_{\text{buoy}} \theta \approx 0$$



$$\underline{\underline{\omega^2 = \frac{lF_{\text{buoy}}}{I_G} = \frac{lmg}{I_G}}}$$

2.17)  $T = \frac{2\pi}{\omega} = \frac{2\pi}{\sqrt{g/L}}$

$$\underline{\underline{L = \frac{gT^2}{4\pi^2} = \frac{32.2(3)^2}{4\pi^2} = 7.34 \text{ ft}}}$$

2.18)  $\sum \vec{M}_0 = I_0^{(\text{rod})} \ddot{\alpha} + \vec{r}_{\text{bob}} \times m \vec{a}_{\text{bob}}$


$$-a \cos \theta \cdot ka \sin \theta - L \cos \theta \cdot mg \sin \theta = L \cdot m L \ddot{\theta}$$

$$mL^2 \ddot{\theta} + [ka^2 + mgL] \sin \theta \cos \theta = 0$$

$$\sin \theta \cos \theta = \left[ \theta - \frac{\theta^3}{3!} + \dots \right] \cdot \left[ 1 - \frac{\theta^2}{2!} + \dots \right] \approx \theta \ll 1$$

$$\ddot{\theta} + \left[ \frac{ka^2 + mgL}{mL^2} \right] \theta = 0$$

$$\underline{\underline{\omega = \sqrt{\frac{ka^2}{mL^2} + \frac{g}{L}}}}$$

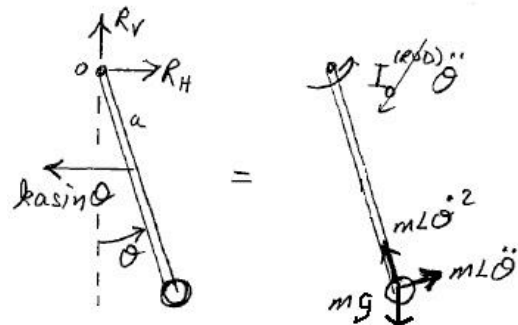

$$2.19) \quad \sum \vec{M}_0 = I_0^{(rod)} \ddot{\alpha} + \vec{r}_{cyl} \times m \vec{a}_{cyl}$$

$$-Lmg \sin \theta + k_T \theta = -L \cdot mL \ddot{\theta}$$


$$mL^2 \ddot{\theta} + k_T \theta - Lmg \sin \theta = 0$$

$$\sin \theta \approx \theta \ll 1$$

$$\ddot{\theta} + \left[ \frac{k_T - mgL}{mL^2} \right] \theta = 0$$

$$\omega = \sqrt{\frac{g}{L} \left[ \frac{k_T}{mgL} - 1 \right]}$$

$$T = \frac{2\pi}{\omega} = \frac{2\pi}{\sqrt{\frac{g}{L} \left[ \frac{k_T}{mgL} - 1 \right]}}$$

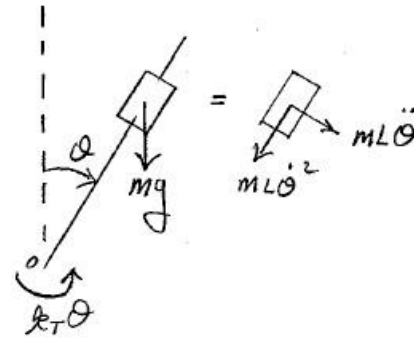

2.20) The solution follows that of Example 2.8, but with the moment of inertia now corresponding to a sphere rather than a disk. Thus,  $I = \frac{2}{5} mR^2$

From Eqs. (h), (j), and (k) of Ex. 2.8:

$$I_p \left( \frac{R-r}{r} \right) \ddot{\theta} + mgr \sin \theta = 0$$

where  $I_p = I_G + mr^2 = \frac{2}{5} mr^2 + mr^2 = \frac{7}{5} mr^2$  and  $\sin \theta \approx \theta \ll 1$

$$\frac{7}{5} mr^2 \left( \frac{R-r}{r} \right) \ddot{\theta} + mgr \theta = 0 \text{ or } \ddot{\theta} + \frac{g}{L_{eff}} \theta = 0$$

where  $L_{eff} = \frac{7}{5} (R-r) = \frac{7}{5} (100-1.5) = 137.9 \text{ cm}$

$$\omega = \sqrt{\frac{g}{L_{eff}}} = \sqrt{\frac{981}{137.9}} = 2.67 \text{ rad/sec}$$


$$T = \frac{2\pi}{\omega} = \frac{2\pi}{2.67} = 2.36 \text{ sec}$$

$$t_{rise} = \frac{T}{2} = 1.18 \text{ sec}$$

$$2.21) \quad \sum M_0 = I \alpha: \quad 2kR^2 \theta = -I \ddot{\theta}$$

$$\ddot{\theta} + \frac{2kR^2}{I} \theta = 0$$

$$\omega = 2\sqrt{\frac{k}{m}}$$

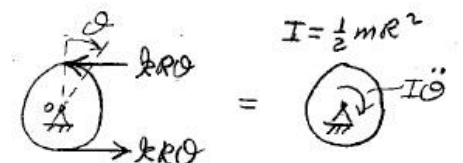

2.22)  $\theta(t) = \theta_0 \cos \omega t + \frac{\dot{\theta}_0}{\omega} \sin \omega t$

$$\theta(t) = \theta_0 \cos 2\sqrt{\frac{k}{m}}t$$

2.23) Wheel:  $\sum M_0 = I\alpha: -PR_0 \cos \beta = -I\ddot{\theta}$

$$I\ddot{\theta} + PR_0 \cos \beta = 0$$

$$\beta \ll 1: I\ddot{\theta} + PR_0 \approx 0$$

Block:  $\sum F_x = m\ddot{x}: P \cos \psi - kx = m\ddot{x}$

$$\psi \ll 1: m\ddot{x} + kx \approx P$$

(2) into (1)

$$I\ddot{\theta} + mR_0\ddot{x} + kR_0x = 0$$

Need  $\theta - x$  relation  $\rightarrow$

$$x = R_0 \sin \theta + L(\cos \psi - \cos \psi_0) \approx R_0 \theta$$


(4) into (3)

$$\left( \frac{I}{R_0} + mR_0 \right) \ddot{\theta} + kR_0\theta = 0$$

$$\omega = \sqrt{\frac{kR_0^2}{I + mR_0^2}}$$

2.24) (a) Execute the following Matlab code:

```
theta=0.01:0.01:3;
q=sin(theta/2);
m=q.*q;
Tbar=(2/pi)*ellipke(m);
plot(theta,Tbar)
```

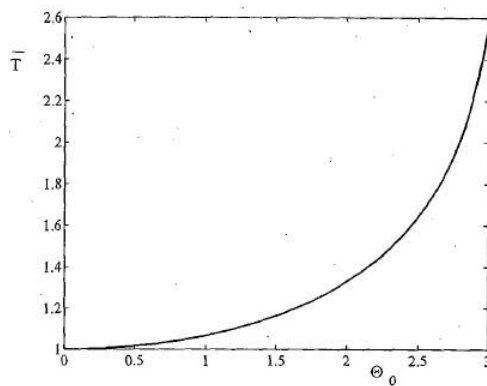

$$(b) \quad \bar{T} = \frac{1}{1-E} = \frac{2}{\pi} F(m)$$

$$(i) \quad \bar{T} = \frac{1}{1-.05} = 1.05, \quad F(m) = \frac{\pi}{2} \bar{T} = \frac{\pi}{2} (1.05) = 1.65$$


$$\underline{\underline{\theta_0 = 0.873 \text{ rad}}}$$

$$(ii) \quad \bar{T} = \frac{1}{1-.01} = 1.01, \quad F(m) = \frac{\pi}{2} \bar{T} = \frac{\pi}{2} (1.01) = 1.59$$

$$\underline{\underline{\theta_0 = 0.400 \text{ rad}}}$$

2.25) (a)  $c = 1 \text{ N} \cdot \text{sec/m}$

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{6}{4}} = 1.225 \text{ rad/sec}$$



$$\zeta = \frac{c}{2\omega m} = \frac{1}{2(1.225)(4)} = 0.1020$$

$$\omega_d = \omega \sqrt{1 - \zeta^2} = 1.225 \sqrt{1 - (0.1020)^2} = 1.219 \text{ rad/sec}$$

$$\zeta \omega = (0.1020)(1.225) = 0.1250 \text{ rad/sec}$$

$$\underline{\underline{A = 2 \sqrt{1 + \frac{[\{4 / (1.225)(2)\} + 0.1020]^2}{1 - (0.1020)^2}} = 4.020 \text{ m}}}$$

$$\underline{\underline{\phi = \tan^{-1} \left\{ \frac{\frac{4}{(1.225)(2)} + 0.1020}{\sqrt{1 - (0.1020)^2}} \right\} = 1.050 \text{ rad}}}$$

$$\underline{\underline{x(t) = 4.020 e^{-0.1250t} \cos(1.219t - 1.050) \text{ meters}}}$$

(b)  $c = 5 \text{ N} \cdot \text{sec/m}, \quad \omega = 1.225 \text{ rad/sec}$

$$\zeta = \frac{c}{2\omega m} = \frac{5}{2(1.225)(4)} = 0.5100$$

$$\omega_d = \omega \sqrt{1 - \zeta^2} = 1.225 \sqrt{1 - (0.5100)^2} = 1.054 \text{ rad/sec}$$

$$\zeta \omega = (0.5100)(1.225) = 0.6248 \text{ rad/sec}$$

$$A = 2\sqrt{1 + \frac{[\{4/(1.225)(2)\} + 0.51]^2}{1 - (0.51)^2}} = 5.368 \text{ m}$$


$$\phi = \tan^{-1} \left\{ \frac{\frac{4}{(1.225)(2)} + 0.51}{\sqrt{1 - (0.51)^2}} \right\} = 1.189 \text{ rad}$$

$$\underline{x(t) = 5.368e^{-0.6248t} \cos(1.054t - 1.189) \text{ meters}}$$


(c)  $c = 10 \text{ N} \cdot \text{sec/m}, \quad \omega = 1.225 \text{ rad/sec}$

$$\zeta = \frac{c}{2\omega m} = \frac{10}{2(1.225)(4)} = 1 \text{ (critical damping)}$$

$$\underline{x(t) = [2 + \{4 + (1.225)(2)\}t]e^{-1.225t} = [2 + 6.45t]e^{-1.225t} \text{ meters}}$$

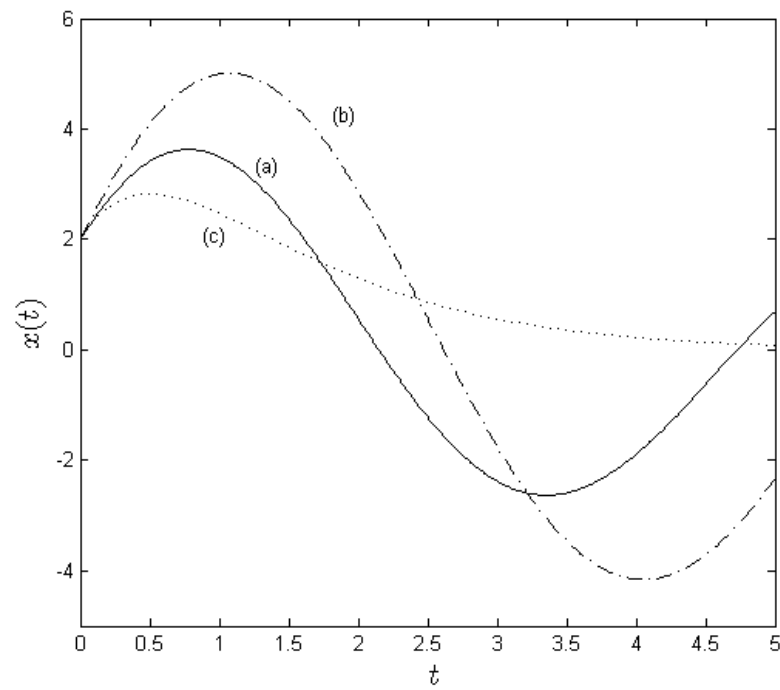

2.26) (a)  $c = 2 \text{ N} \cdot \text{sec/m}$ ,  $\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{4}{2}} = \sqrt{2} = 1.414 \text{ rad/sec}$



$$\zeta = \frac{c}{2\omega m} = \frac{2}{2(\sqrt{2})(2)} = 0.3536$$

$$\omega_d = \omega\sqrt{1-\zeta^2} = 1.323 \text{ rad/sec}$$

$$\zeta\omega = 0.500 \text{ rad/sec}$$

$$A = x_0 \sqrt{1 + \frac{\zeta^2}{1-\zeta^2}} = \frac{x_0}{\sqrt{1-\zeta^2}} = \frac{1}{\sqrt{1-(0.3536)^2}} = 1.069 \text{ m}$$

$$\phi = \tan^{-1} \left\{ \frac{\zeta}{\sqrt{1-\zeta^2}} \right\} = \tan^{-1} \left\{ \frac{0.3536}{\sqrt{1-(0.3536)^2}} \right\} = 0.3614 \text{ rad}$$

$$\underline{x(t) = 1.069e^{-0.5t} \cos(1.323t - 0.3614) \text{ meters}}$$


(b)  $c = 8 \text{ N} \cdot \text{sec/m}$ ,  $\omega = \sqrt{2} = 1.414 \text{ rad/sec}$

$$\zeta = \frac{c}{2\omega m} = \frac{8}{2(\sqrt{2})(2)} = 1.414 > 1 \text{ (overdamped system)}$$

$$z = \sqrt{\zeta^2 - 1} = \sqrt{(\sqrt{2})^2 - 1} = 1$$

$$\zeta\omega = 2 \text{ rad/sec}$$

$$\underline{x(t) = e^{-2t} [\cosh \sqrt{2}t + \sqrt{2} \sinh \sqrt{2}t] \text{ meters}}$$

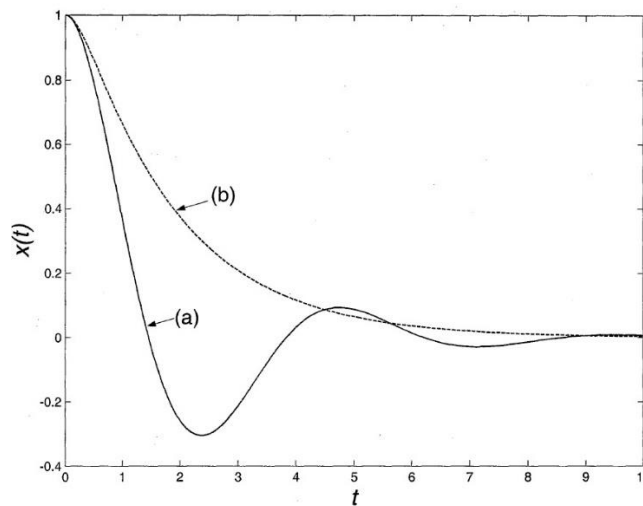




2.27) Kinetics:

$$\sum \vec{M}_P = I_G \ddot{\alpha} + \vec{r}_{PG} \times m \ddot{a}_{PG}$$

$$-(kx + c\dot{x})R = I_G \alpha + m\ddot{x}R$$

Kinematics for no slip:

$$x = R\theta, \quad \dot{x} = R\dot{\theta}, \quad \ddot{x} = R\ddot{\theta} \Rightarrow \alpha = \ddot{\theta} = \frac{1}{R}\ddot{x}$$

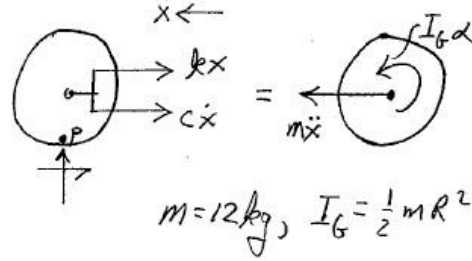

(1)

$$\begin{aligned} -(kx + c\dot{x})R &= \frac{1}{R}(I_G + mR^2)\ddot{x} \\ (2) \text{ into } (1) &= \frac{1}{R}\left(\frac{1}{2}mR^2 + mR^2\right)\ddot{x} \\ &= \frac{3}{2}mR\ddot{x} \end{aligned}$$

$$\text{Thus, } \ddot{x} + \frac{2}{3}\frac{c}{m}\dot{x} + \frac{2}{3}\frac{k}{m}x = 0 \quad \text{or} \quad \ddot{x} + 2\omega\zeta\dot{x} + \omega^2x = 0$$

$$\text{where } \omega = \sqrt{\frac{2}{3}\frac{k}{m}} = \sqrt{\frac{2}{3}\left(\frac{8}{12}\right)} = 0.7454 \text{ rad/sec}$$

$$2\omega\zeta = \frac{2}{3}\frac{c}{m} \Rightarrow \zeta = \frac{c}{3\omega m} = \frac{8}{3(0.7454)(12)} = 0.2981$$

$$\omega_d = \omega\sqrt{1-\zeta^2} = 0.7454\sqrt{1-(0.2981)^2} = 0.7115 \text{ rad/sec}$$

2.28)  $\sum \vec{M}_0 = I_0^{(rod)} \ddot{\alpha} + \vec{r}_{cyl} \times m \ddot{a}_{cyl}$

$$L \cdot cL\dot{\theta} - Lmg \sin \theta + k_T \theta = -L \cdot mL\ddot{\theta}$$


$$mL^2\ddot{\theta} + cL^2\dot{\theta} + k_T \theta - Lmg \sin \theta = 0 \quad \text{where } \sin \theta \approx \theta \ll 1$$

$$\text{Thus, } \ddot{\theta} + \frac{c}{m}\dot{\theta} + \left[\frac{k_T}{mL^2} - \frac{g}{L}\right]\theta = 0$$

$$\omega^2 = \frac{k_T}{mL^2} - \frac{g}{L}$$

$$2\omega\zeta = \frac{c}{m} \Rightarrow \zeta = \frac{c}{2\omega m} = \frac{c}{2m\sqrt{\frac{k_T}{mL^2} - \frac{g}{L}}}$$

$$\omega_d = \omega\sqrt{1-\zeta^2} = \sqrt{\frac{k_T}{mL^2} - \frac{g}{L} - \frac{c^2}{4m^2}}$$

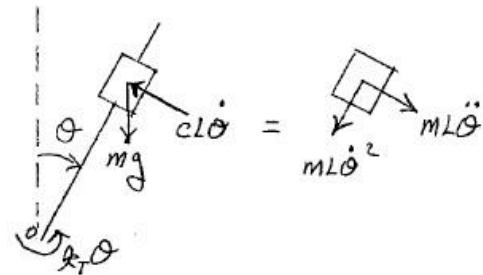

2.29) (a)  $T = 2.6 \text{ sec}, T_d = 3 \text{ sec}$

$$\omega_d = \omega \sqrt{1 - \zeta^2} \Rightarrow \zeta^2 = 1 - \left( \frac{\omega_d}{\omega} \right)^2 = 1 - \left( \frac{2\pi/T_d}{2\pi/T} \right)^2 = 1 - \left( \frac{T}{T_d} \right)^2$$

$$\zeta = \sqrt{1 - \left( \frac{T}{T_d} \right)^2} = \sqrt{1 - \left( \frac{2.6}{3} \right)^2} = 0.50$$

(b)  $x_1 = 1 \text{ in}, x_4 = 0.1 \text{ in}, n = 3$

From Eq. (2.89),  $\bar{\delta} = \frac{1}{n} \ln \frac{x_1}{x_{n+1}} = \frac{1}{3} \ln \frac{1}{0.1} = 0.7675$

$$\zeta = \frac{0.7675}{\sqrt{4\pi^2 + (0.7675)^2}} = 0.1213$$

2.30)  $\sum M_0 = I\alpha: k_r \theta + cl^2 \dot{\theta} - \frac{L}{2} W \cos \theta = -I\ddot{\theta}$

$\cos \theta \approx 1$  for  $\theta \ll 1$

$$\ddot{\theta} + \frac{cl^2}{I} \dot{\theta} + \frac{k_r}{I} \theta \approx \frac{WL}{2I}$$

or

$$\ddot{\beta} + \frac{cl^2}{I} \dot{\beta} + \frac{k_r}{I} \beta = 0 \text{ where } \beta(t) = \theta(t) - \theta_{\text{static}} = \theta(t) - \frac{WL}{2k_r}$$

$$I = \frac{1}{12} mh^2 + \frac{1}{3} mL^2 = \frac{1}{3} mL^2 \left[ \frac{1}{4} \left( \frac{h}{L} \right)^2 + 1 \right] \approx \frac{1}{3} mL^2$$

$$I = \frac{1}{3} \frac{\gamma}{g} AL^3 = \frac{1}{3} \frac{(48)(2)(7)^3}{32.2} = 340.9 \text{ slug} \cdot \text{ft}^2$$


$$W = \gamma AL = (48)(2)(7) = 672 \text{ lb}$$

$$\omega = \sqrt{\frac{k_r}{I}} = \sqrt{\frac{13.45 \times 10^3}{340.9}} = 39.45 \text{ rad/sec}$$

$$\bar{\delta} = \frac{1}{5} \ln \frac{1}{0.02} = 0.7824$$

$$\zeta = \frac{\bar{\delta}}{\sqrt{4\pi^2 + \bar{\delta}^2}} = \frac{0.7824}{\sqrt{4\pi^2 + (0.7824)^2}} = 0.1236$$

$$2\omega\zeta = cl^2 / I \Rightarrow c = \frac{2\omega\zeta I}{l^2} = \frac{2(39.45)(0.1236)(340.9)}{(2)^2} = 831.1 \text{ lb} \cdot \text{sec/ft}$$

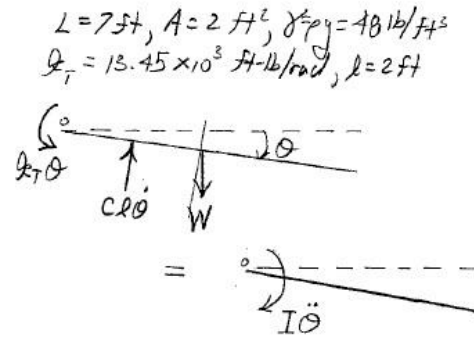

$$2.31) \quad \sum \vec{M}_0 = I_0^{(rod)} \ddot{\alpha} + \vec{r}_{bob} \times m \vec{a}_{bob}$$

$$-a \cos \theta \left[ c \ddot{\alpha} \sin \theta + ka \sin \theta \right] - L \cdot mg \sin \theta = L \cdot mL \ddot{\theta}$$

$$mL^2 \ddot{\theta} + ca^2 \cos^2 \theta \dot{\theta} + ka^2 \sin \theta \cos \theta + mgL \sin \theta = 0$$

$$\cos^2 \theta = \left[ 1 - \frac{\theta^2}{2!} + \dots \right]^2 \approx 1$$

$$\sin \theta \cos \theta = \left[ \theta - \frac{\theta^3}{3!} + \dots \right] \cdot \left[ 1 - \frac{\theta^2}{2!} + \dots \right] \approx \theta \ll 1$$


$$mL^2 \ddot{\theta} + ca^2 \dot{\theta} + [ka^2 + mgL] \theta \approx 0$$

$$\ddot{\theta} + \frac{ca^2}{mL^2} \dot{\theta} + \left[ \frac{ka^2}{mL^2} + \frac{g}{L} \right] \theta \approx 0$$

$$\omega = \sqrt{\frac{ka^2}{mL^2} + \frac{g}{L}}$$

$$2\omega\zeta = \frac{ca^2}{mL^2} \Rightarrow c = 2\zeta m \left( \frac{L}{a} \right)^2 \sqrt{\frac{ka^2}{mL^2} + \frac{g}{L}}$$

$$\underline{\underline{c_{cr} = c|_{\zeta=1} = 2m \left( \frac{L}{a} \right)^2 \sqrt{\frac{ka^2}{mL^2} + \frac{g}{L}}}}$$

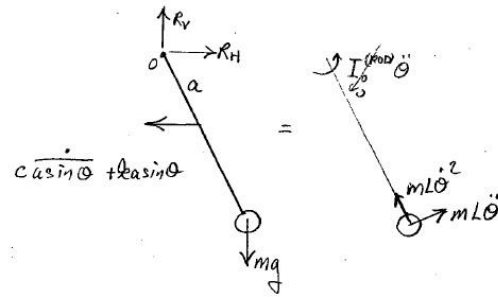

$$2.32) \quad \zeta = 1 \quad \underline{\underline{c_{cr} = \frac{2\omega\zeta I}{l^2} = \frac{2(39.45)(340.9)}{(2)^2} = 6724 \text{ lb} \cdot \text{sec/ft}}}}$$

$$2.33) \quad \sum M_0 = I\alpha : -ca^2 \dot{\theta} - k_T \theta = I \ddot{\theta}$$


$$\ddot{\theta} + \frac{ca^2}{I} \dot{\theta} + \frac{k_T}{I} \theta = 0$$

$$I = \frac{1}{12} mh^2 + \frac{1}{3} ml^2 = \frac{1}{3} ml^2 \left[ \frac{1}{4} \left( \frac{h}{l} \right)^2 + 1 \right] \approx \frac{1}{3} ml^2$$

$$\omega = \sqrt{k_T / I}$$

$$2\omega\zeta = ca^2 / I \Rightarrow c = 2\omega\zeta I / a^2$$

$$\underline{\underline{c_{cr} = c|_{\zeta=1} = \frac{2\omega I}{a^2} = \frac{2l}{a^2} \sqrt{\frac{k_T m}{3}}}}$$

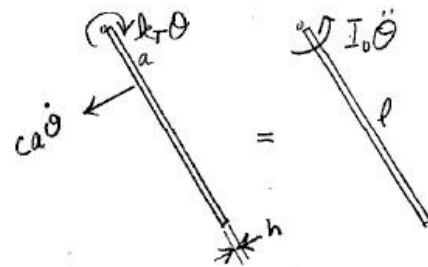

$$2.34) \quad \frac{-4}{1.225(2)} < -1 \quad \checkmark$$

$$\text{Eq. (2.100): } t_a = \frac{1}{\| -4/2 \| - 1.225} = 1.290 \text{ sec}$$

$$\text{Eq. (2.101): } t_{os} = t_a + \frac{1}{\omega} = 1.290 + \frac{1}{1.225} = 2.106 \text{ sec}$$

$$\text{Eq. (2.102):}$$

$$x_{os} = -\frac{x_0}{\omega t_a} e^{-(\omega t_a + 1)} = -\frac{2}{(1.225)(1.290)} e^{-((1.225)(1.290) + 1)} = -0.09588 \text{ m}$$


---

$$2.35) \quad \frac{-2}{1.414(1)} < -1 \quad \checkmark$$

$$\text{Eq. (2.100): } t_a = \frac{1}{\| -2/1 \| - 1.414} = 1.706 \text{ sec}$$

$$\text{Eq. (2.101): } t_{os} = t_a + \frac{1}{\omega} = 1.706 + \frac{1}{1.414} = 2.413 \text{ sec}$$

$$\text{Eq. (2.102):}$$

$$x_{os} = -\frac{x_0}{\omega t_a} e^{-(\omega t_a + 1)} = -\frac{1}{(1.414)(1.706)} e^{-((1.414)(1.706) + 1)} = -0.01367 \text{ m}$$


---

$$2.36) \quad m = 4 \text{ kg}, \quad k = 6 \text{ N/m}, \quad \mu_s = \mu_k = 0.1, \quad x_0 = 2 \text{ m}, \quad v_0 = 4 \text{ m/sec}$$

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{6}{4}} = 1.225 \text{ rad/sec}, \quad T = \frac{2\pi}{\omega} = \frac{2\pi}{1.225} = 5.130 \text{ sec}$$

$$f_\mu = \mu_k \frac{mg}{k} = (0.1) \frac{(4)(9.81)}{6} = 0.6540 \text{ m}$$

$$n_{cr} = \frac{1}{2} \left[ \frac{2}{0.6540} - 1 \right] = 1.029 \Rightarrow n_{stick} = 2$$

$$t_{stick} = t_2 = \frac{(2)(5.13)}{2} = 5.130 \text{ sec}$$


---

$$\|x_{stick}\| = x_2 = \|2 - 2(2)(0.6540)\| = 0.616 \text{ m}$$


---

2.37)  $m = 2\text{ kg}, k = 4\text{ N/m}, \mu_s = 0.12, \mu_k = 0.1$

$$\bar{\mu} = \frac{\mu_s}{\mu_k} = \frac{0.12}{0.10} = 1.2$$

Eq. (2.116): 
$$\Delta = 4f_\mu = 4\mu_k \frac{mg}{k} = 4(0.10) \frac{(2)(9.81)}{4} = 1.962\text{ m}$$


$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{4}{2}} = \sqrt{2} = 1.414\text{ rad/sec}$$

2.38) Eq. (1.92):  $W^{(NC)} = \Delta T + \Delta U$

$$\int_{x_1}^{x_2} F^{(NC)} dx = \left[ \frac{1}{2} m v_2^2 - \frac{1}{2} m v_1^2 \right] + \left[ \frac{1}{2} k x_2^2 - \frac{1}{2} k x_1^2 \right]$$

over  $\frac{1}{2}$  cycle:  $-\int \mu_k mg dx = [0 - 0] + \frac{1}{2} k [x_2^2 - x_1^2]$

$$-\mu_k mg (x_2 - x_1) = \frac{1}{2} k (x_2 + x_1)(x_2 - x_1)$$

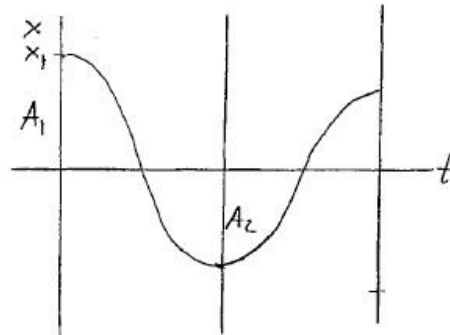

$$\begin{aligned} -\mu_k mg &= \frac{1}{2} k (x_2 + x_1) \\ &= \frac{1}{2} k (-A_2 + A_1) \\ &= -\frac{1}{2} k (A_1 - A_2) \\ &= -\frac{1}{2} k \frac{\Delta}{2} \end{aligned}$$

$$\Delta = 4\mu_k \frac{mg}{k}$$

