

Solutions Manual

to accompany

Environmental Engineering Science

William W Nazaroff and Lisa Alvarez-Cohen

*Department of Civil and Environmental Engineering
University of California, Berkeley*

Prepared By:

Anna Steding

*Department of Civil and Environmental Engineering
University of California, Berkeley*



JOHN WILEY & SONS, INC.

New York • Chichester • Weinheim • Brisbane • Singapore • Toronto

To order books or for customer service call 1-800-CALL-WILEY (225-5945).

Copyright © 2001 by John Wiley & Sons, Inc.

Excerpts from this work may be reproduced by instructors for distribution on a not-for-profit basis for testing or instructional purposes only to students enrolled in courses for which the textbook has been adopted. *Any other reproduction or translation of this work beyond that permitted by Sections 107 or 108 of the 1976 United States Copyright Act without the permission of the copyright owner is unlawful. Requests for permission or further information should be addressed to the Permissions Department, John Wiley & Sons, Inc., 605 Third Avenue, New York, NY 10158-0012.*

ISBN 0-471-35226-8

Printed in the United States of America

1 0 9 8 7 6 5 4 3 2 1

Printed and bound by Malloy Lithographing, Inc.

Acknowledgments

The problems were developed over the course of a decade, mainly as part of teaching the upper-division course Environmental Engineering (CE 111) for which the text was written. When problems were assigned as homework, our teaching assistants were given the responsibility of writing solutions, which we then checked for accuracy. Those solutions served as the raw material that Anna Steding used in preparing this Solutions Manual. We thank them for their contributions: John Little, Dianne Gates, Shelly Miller, Mark Hernandez, Tracy Thatcher, Mike Van Loy, Tom Kirchstetter, Rula Deeb, Ruth Richardson, Nikki Lark, Glenn Morrison, Mark Sippola, and De-Ling Liu.

Anna's efforts in preparing this volume involved much more than practicing her excellent penmanship. She derived solutions for a significant number of problems that were new. She also rederived all of the extant solutions to ensure their accuracy. We take this opportunity to extend our warm thanks to her for the excellent job she has done!

William W Nazaroff
Lisa Alvarez-Cohen
October 10, 2000

CONTENTS

1 Overview 1

- 1.1 Units and unit conversion exercises 1
- 1.2 Unit conversion exercises and exposure pathways 2
- 1.3 Measures of vinyl chloride in water and air 3
- 1.4 Impurities in water and unit conversions 3
- 1.5 Global CO₂ accumulation 4
- 1.6 Role of U.S. automobiles in global CO₂ accumulation 5
- 1.7 Waste disposal from dry cleaning 5
- 1.8 A water resources problem 6
- 1.9 Characteristic times and urban air quality 7
- 1.10 Cleansing time scale for a lake 8
- 1.11 Stocks, flows, and politics 8
- 1.12 Residence time of a water molecule in a human 9
- 1.13 Stocks, flows, and residence times in Lake Shasta 9
- 1.14 Sulfur in the oceans 11
- 1.15 Estimating magnitudes 12

2 Water, Air, and Their Impurities 13

- 2.1 Density of water 13
- 2.2 Gaining a sense of scale 13
- 2.3 Volume occupied by air 16
- 2.4 Aspects of the hydrologic cycle 17
- 2.5 Applying the ideal gas law 18
- 2.6 Water, water, everywhere 19
- 2.7 Composition of humid air 20
- 2.8 Cartesian diver 21
- 2.9 Basic concepts about environmental contaminants 21
- 2.10 An investigatory problem 22
- 2.11 1,3-Butadiene 23
- 2.12 Fundamental water quality parameters 24
- 2.13 Impurities in water and unit conversions 25
- 2.14 Electroneutrality 25
- 2.15 River water quality 27
- 2.16 What are you drinking? 30
- 2.17 Water hardness 31
- 2.18 Alkalinity 33
- 2.19 Solids characterization 33
- 2.20 Towards understanding turbidity 34
- 2.21 The trouble with MTBE 36

3 Transformation Processes 39

- 3.1 Concepts in environmental transformation 39
- 3.2 Water quality in the Mississippi River 42
- 3.3 Drinking water characteristics 43
- 3.4 Air and water 45
- 3.5 Water vapor in air 47
- 3.6 Stormy weather 49
- 3.7 Humidity exercises 50
- 3.8 Mixing parcels of air 51
- 3.9 Evaporation and dissolution 53
- 3.10 Nitrogen dissolved in water 54
- 3.11 Measuring Henry's law constant for chloroform 54
- 3.12 Applying Henry's law 56
- 3.13 Dissolution of a solid 57
- 3.14 Solid solubility 59
- 3.15 Is iron sulfide an acid or a base? 60
- 3.16 Sorption and the Freundlich isotherm 61
- 3.17 Activated carbon sorption isotherms 63
- 3.18 Sorbing trichloroethylene on activated carbon 65
- 3.19 An exercise in determining pH and converting units 66
- 3.20 A generic acid-base problem 67
- 3.21 Strong acids and bases 68
- 3.22 More acid-base chemistry 68
- 3.23 Window cleaner chemistry 70
- 3.24 An equilibrium, acid-base, phase-change problem 72
- 3.25 A buffered solution 73
- 3.26 Water and limestone 74
- 3.27 The pH of bubbly drinks 75
- 3.28 The pH of seltzer water: An experiment 77
- 3.29 Cows and pH: Basic rain? 79
- 3.30 Carbonate system and chemical equilibrium 80
- 3.31 Sulfur dioxide and acid rain 81
- 3.32 Another acid-base problem involving a phase change 84
- 3.33 Agricultural runoff 86
- 3.34 Spelunking! 88
- 3.35 A corrosion redox problem 90
- 3.36 Combustion stoichiometry 90
- 3.37 Oxygen requirement for organic oxidation 91
- 3.38 By the light of a candle 92
- 3.39 Redox stoichiometry 93
- 3.40 Waste incineration 94
- 3.41 Up in smoke 96
- 3.42 Theoretical oxygen demand 99
- 3.43 Theoretical oxygen demand for a pure hydrocarbon 99

3.44	Elementary pollutant dynamics	100
3.45	Elementary reaction kinetics	100
3.46	BOD evaluation	102
3.47	Reaction kinetics for BOD	103
3.48	Carbonaceous and nitrogenous oxygen demand	104
3.49	Biochemical oxygen demand	105
3.50	Elementary reaction kinetics	106
3.51	The mathematics of first-order kinetics	106
3.52	Elementary kinetics	108
3.53	Determining the rate of a chemical reaction	109
3.54	Popcorn kinetics: An experiment	110
3.55	Kinetics of elementary reactions	111
3.56	Batch reactor kinetics: Sequential first-order reactions	115
3.57	Batch reactor kinetics: Unknown rate law	117
3.58	Kinetics of radioactive decay	118
3.59	Kinetics of a third-order reaction	119
3.60	Biotreatment and Henry's law	121
3.61	Microbial growth kinetics	122

4 Transport Phenomena 125

4.1	Environmental transport: concepts and exercises	125
4.2	More on environmental transport processes	126
4.3	Magnitude estimates for diffusion	128
4.4	Comparing transport and reaction time scales	129
4.5	Contaminant flux	129
4.6	Estimating plume spread	130
4.7	Drag on a sphere	131
4.8	Factors influencing particle settling	132
4.9	Acceleration to the terminal settling velocity	132
4.10	It's raining gold!	134
4.11	Irritating building materials	136
4.12	The great benzene escape	137
4.13	Contaminant diffusion through a landfill liner	138
4.14	The case of the missing perfume	139
4.15	Interfacial mass transfer of oxygen into a lake	140
4.16	Filter hydraulics: The Brita® water filter	143

5 Transport and Transformation Models 145

5.1	Transport and transformation models	145
5.2	Interpreting a tracer study of a reactor	145
5.3	Chemical tracers to investigate mixing in reactors	147
5.4	Reactor response to a nonreactive tracer	149
5.5	Transient reactor response with first-order decay	150
5.6	Lead in lake water: CMFR transient response	152

5.7	Behavior of flow reactors for a zeroth-order reaction	154
5.8	Reactor engineering	155
5.9	Effectiveness of a CMFR as a function of reaction order	156
5.10	Reactor performance	158
5.11	Reactor performance II	159
5.12	Reactor performance III	160
5.13	Conversion in a plug-flow reactor	161
5.14	Reactor design	161
5.15	Reactor design II	163
5.16	Designing a PFR for a second-order process	164
5.17	Second-order reaction in a CMFR	165
5.18	Sizing a CMFR for a treatment process	166
5.19	Water storage as a control for radon	167
5.20	Reaction mechanisms and rates	169
5.21	Comparing reactor efficiencies	170
5.22	More on reactor models and contaminant transport	172
5.23	Characteristic time: Transport plus transformation	174
5.24	Radon diffusion through plastic sheeting	175
5.25	DO, BOD, and interfacial mass transfer	176
5.26	MacGyver outwits the bad guys	177
5.27	Reagent requirements in a treatment process	179
5.28	Treatment reactor for toluene	181
5.29	Ideal reactors and nonideal reactors	183
5.30	PCBs in the Hudson River	186
5.31	Hydrogen sulfide odors from gold-mining residues	187
5.32	Biodegradation and volatilization	190
5.33	Particles in a box	192
5.34	Particle removal by settling	194
5.35	Kinetics of a treatment process	198
5.36	Modeling urban air toxics	200

6 Water Quality Engineering 203

6.1	Issues in water and wastewater treatment	203
6.2	Cultural eutrophication	205
6.3	Toxic metals and the role of pH	206
6.4	"Your water and your health"	207
6.5	Water quality measures applied to Perrier	209
6.6	Fundamentals of water and wastewater treatment	210
6.7	Overall design of a municipal water treatment plant	211
6.8	Turbidity control	212
6.9	Chemicals used in water and wastewater treatment	214
6.10	Wastewater treatment system	214
6.11	Technologies for treating water and wastewater	215
6.12	Wastewater treatment	216

6.13	Fundamental aspects of wastewater treatment	216
6.14	Reactor design for a treatment process	217
6.15	Total particle mass removal in sedimentation tanks	218
6.16	Grit chamber effectiveness	220
6.17	Primary sedimentation tanks	222
6.18	A sedimentation basin design problem	223
6.19	Settling velocities of particles	224
6.20	Application of a sedimentation-basin for coal cleaning	225
6.21	Preliminary sizing of a sedimentation basin	226
6.22	Filtration velocity through a dual-filter media	228
6.23	Sorption for controlling dissolved organics	229
6.24	Sorption by activated carbon	230
6.25	Sorption for pesticide removal from drinking water	231
6.26	Impact of coagulation on particle removal rates in sedimentation tanks	233
6.27	Sedimentation basin efficiency	234
6.28	Softening limestone-hardened water	235
6.29	Water softening and the hardness of water	237
6.30	Water softening: Reagent needs and sludge formation	238
6.31	Precipitation as a treatment method for barium	240
6.32	Water softening by the lime-soda process	243
6.33	Drinking water treatment by chemical precipitation	246
6.34	Chemical precipitation at a metal plating shop	247
6.35	Disinfection with chlorine	249
6.36	Chemistry of a disinfectant: Household bleach	250
6.37	Chlorine chemistry	252
6.38	Disinfection kinetics for chlorine	253
6.39	Disinfection stoichiometry	255
6.40	More issues in drinking water disinfection	256
6.41	Chlorine disinfection and pH	256
6.42	Disinfection kinetics and reactor design	258
6.43	Drinking water disinfection	260
6.44	Sludge production in a wastewater treatment system	261
6.45	Microbial kinetics and bioreactors	262
6.46	Performance parameters for an activated sludge unit	265
6.47	Secondary (biological) treatment of wastewater	268
6.48	Activated sludge kinetics	268
6.49	Activated sludge operations II	270
6.50	Two-chamber bioreactor for wastewater treatment	271
6.51	Controlling VOC emissions from wastewater treatment	273
6.52	Biochemical oxygen demand	275
6.53	Wastewater discharge into a river	275
6.54	Contaminant decay in a river	276
6.55	The impact of wastewater discharge on a river	278
6.56	Wastewater discharge into a first-class fishing river	279
6.57	Deep-ocean outfalls and trapped plumes	283

6.58	Dissolved oxygen in a goldfish bowl	283
6.59	Assessment of a toxic waste spill	285
6.60	Growth and decay of algae	286
6.61	Analyzing the effects of sewage discharge into a lake	287
6.62	Oxygen depletion in the hypolimnion of a lake	288
6.63	Contamination of river water from sediments	290

7 Air Quality Engineering 293

7.1	Criteria air pollutants	293
7.2	A potpourri of air quality issues	293
7.3	Benzene: Sources, concentrations, and effects	295
7.4	Do you know more than a Harvard graduate?	297
7.5	To air is human	297
7.6	Primary versus secondary air pollutants	298
7.7	On the politics of air pollution control	298
7.8	Smog and more smog	299
7.9	Why do cars emit so much CO?	303
7.10	SO ₂ emission factor	304
7.11	Determining pollutant emission rates	304
7.12	Gasoline vapor emissions from pumping gas	305
7.13	Impact of unvented kerosene space heaters on indoor sulfur dioxide levels	305
7.14	Measuring CO emissions from a kerosene heater	307
7.15	Material balance, stoichiometry, and air pollution	308
7.16	Combustion of landfill gas	308
7.17	Air pollution impacts of electricity production	310
7.18	Fuel selection and air pollution	311
7.19	Control requirements for automobile engines	313
7.20	Not a tornado	314
7.21	Effectiveness of air cleaning for indoor odor control	315
7.22	The case of nitrogen oxides	316
7.23	Zamboni!	317
7.24	Gaussian plumage?	320
7.25	Mercury poisoning from crematoria?	323
7.26	Air pollution and gold mining	324
7.27	Control strategy for ambient particulate matter	326
7.28	Saharan dust in the Central Amazon Basin	327
7.29	Indoor smog	328
7.30	Environmental tobacco smoke	329
7.31	Carbon monoxide emissions from motor vehicles	333
7.32	Measuring automotive CO emissions in a roadway tunnel	334
7.33	Atmospheric stability	334

8 Hazardous Waste Management 337

- 8.1 To be or not to be: Hazardous waste definitions 337
- 8.2 A potpourri of hazardous waste issues 338
- 8.3 TCLP and acid-base chemistry 341
- 8.4 Waste minimization decisions based on present worth analysis 343
- 8.5 Saving some money in Silicon Valley 344
- 8.6 Dissolved air floatation used by the petroleum industry 346
- 8.7 Performance of a dissolved air floatation unit 348
- 8.8 Air stripping for water cleaning 349
- 8.9 Fundamentals of stream stripping 351
- 8.10 Wastes to riches 351
- 8.11 Precipitation of cadmium waste 354
- 8.12 Carbonate precipitation of chromium waste 355
- 8.13 Methods of solidifications/stabilization 357
- 8.14 There's gold in those hills! 358
- 8.15 The thermodynamics of chromium reduction 360
- 8.16 Oxidation of cyanide wastewater from an electroplating company 361
- 8.17 Incineration of a paint-thinning solvent waste 363
- 8.18 Comparing incineration and pyrolysis 365
- 8.19 Treatment of PCE-contaminated soils by incineration 366
- 8.20 Biological treatment of wood-preservative waste 368
- 8.21 Microbiology and chemistry: A winning combination 370
- 8.22 Quantifying the risk associated with kidnapping 373
- 8.23 Site remediation for mixed groundwater contamination 374
- 8.24 In situ bioremediation of hydrocarbons and trichloroethylene 377
- 8.25 Superfund closure criteria 378

Chapter 1

1.1

(a) In water "ppb" refers to a mass fraction:

$$\text{ppb (water)} = \frac{\text{mass of contaminant} \times 10^9}{\text{mass of (water + contaminant)}}$$

In air "ppb" refers to a mole or, equivalently, volume fraction:

$$\text{ppb (air)} = \frac{\text{moles (or volume) of contaminant} \times 10^9}{\text{moles (or volume) of (air + contaminant)}}$$

Since the mass and moles of a contaminant are usually much lower than the mass of water and moles of air, respectively, the contaminant is usually left out of the denominator.

(b) 35 ppm is equal to $\frac{35 \times 10^{-6} \text{ moles CO}}{\text{mole air}}$

To convert this to a mass concentration, we first need to determine what volume is taken up by 1 mole of air. We can use the IDEAL GAS LAW:

$$PV = nRT ; \quad \frac{V}{n} = \frac{RT}{P}$$

Assuming $P = 1 \text{ atm}$ and $T = 293 \text{ K}$, and using $R = 82.05 \times 10^{-6} \frac{\text{atm m}^3}{\text{mol K}}$:

$$\begin{aligned} \frac{V}{n} &= \frac{(82.05 \times 10^{-6} \text{ atm m}^3 \text{ mol}^{-1} \text{ K}^{-1})(293 \text{ K})}{1 \text{ atm}} \\ &= 0.024 \text{ m}^3 \text{ mol}^{-1} \end{aligned}$$

We also need to know what mass is contained in 1 mole of CO:

$$MW_{\text{CO}} = 12 \text{ g mol}^{-1} + 16 \text{ g mol}^{-1} = 28 \text{ g mol}^{-1}$$

Thus, the conversion is:

$$\begin{aligned} &\left(\frac{35 \times 10^{-6} \text{ mol CO}}{\text{mol air}} \right) \left(\frac{28 \text{ g CO}}{\text{mol}} \right) \left(\frac{10^3 \text{ mg}}{\text{g}} \right) \left(\frac{1 \text{ mol air}}{0.024 \text{ m}^3 \text{ air}} \right) \\ &= \boxed{41 \text{ mg m}^{-3}} \end{aligned}$$

(c) The conversion is:

$$\left(\frac{0.005 \text{ mg Cd}}{\text{L H}_2\text{O}} \right) \left(\frac{1 \text{ L H}_2\text{O}}{1000 \text{ g H}_2\text{O}} \right) \left(\frac{1 \text{ g Cd}}{10^3 \text{ mg Cd}} \right) (10^6) = \boxed{0.005 \text{ ppm}}$$

↖ to convert to ppm

1.2

- (a) As in problem 1.1(b) above, we use the ideal gas law and the molecular weight of the contaminant, in this case CHCl_3 , to make the conversion. Recall:

$$PV = nRT ; \frac{V}{n} = \frac{RT}{P}$$

With $P = 1 \text{ atm}$ and $T = 293 \text{ K}$, and using $R = 82.05 \times 10^{-6} \frac{\text{atm m}^3}{\text{mol K}}$:

$$\begin{aligned} \frac{V}{n} &= \frac{(82.05 \times 10^{-6} \text{ atm m}^3 \text{ mol}^{-1} \text{ K}^{-1})(293 \text{ K})}{1 \text{ atm}} \\ &= 0.024 \text{ m}^3 \text{ mol}^{-1} \end{aligned}$$

The molecular weight of CHCl_3 is:

$$\begin{aligned} \text{MW}_{\text{CHCl}_3} &= 12 \text{ g mol}^{-1} + 1 \text{ g mol}^{-1} + 3(35.5 \text{ g mol}^{-1}) \\ &= 119.5 \text{ g mol}^{-1} \end{aligned}$$

The conversion is:

$$\begin{aligned} &\left(\frac{0.4 \text{ } \mu\text{g CHCl}_3}{\text{m}^3 \text{ air}} \right) \left(\frac{0.024 \text{ m}^3 \text{ air}}{\text{mol air}} \right) \left(\frac{1 \text{ g}}{10^6 \text{ } \mu\text{g}} \right) \left(\frac{1 \text{ mol CHCl}_3}{119.5 \text{ g CHCl}_3} \right) (10^9) \\ &= \boxed{0.08 \text{ ppb CHCl}_3} \end{aligned}$$

- (b) we use the fact that the density of water is 1 g/mL to make the conversion:

$$\begin{aligned} &\left(\frac{42 \text{ } \mu\text{g CHCl}_3}{\text{L H}_2\text{O}} \right) \left(\frac{1 \text{ L}}{10^3 \text{ mL}} \right) \left(\frac{1 \text{ mL H}_2\text{O}}{\text{g H}_2\text{O}} \right) \left(\frac{1 \text{ g}}{10^6 \text{ } \mu\text{g}} \right) (10^9) \\ &= \boxed{42 \text{ ppb CHCl}_3} \end{aligned}$$

- (c) The exposures to CHCl_3 through inhalation and ingestion:

	Inhalation	Ingestion
Amount consumed	$20 \text{ m}^3 \text{ day}^{-1}$	2 L day^{-1}
CHCl_3 concentration	$0.4 \text{ } \mu\text{g m}^{-3}$	$42 \text{ } \mu\text{g L}^{-1}$
CHCl_3 exposure	$8 \text{ } \mu\text{g day}^{-1}$	$84 \text{ } \mu\text{g day}^{-1}$

1.2 (continued)

(d) The exposures to C_2Cl_4 through inhalation and ingestion:

	Inhalation	Ingestion
Amount consumed	$20 \text{ m}^3 \text{ day}^{-1}$	2 L day^{-1}
C_2Cl_4 concentration	$2.1 \text{ } \mu\text{g m}^{-3}$	$0.10 \text{ } \mu\text{g L}^{-1}$
C_2Cl_4 exposure	$42 \text{ } \mu\text{g day}^{-1}$	$0.20 \text{ } \mu\text{g day}^{-1}$

(e) Ingestion is more important than inhalation for chloroform (by a factor of 10), while inhalation is more important for C_2Cl_4 .

1.3

(a) The conversion in water is:

$$\left(\frac{80 \times 10^{-9} \text{ g } C_2H_3Cl}{\text{g } H_2O} \right) \left(\frac{10^6 \text{ } \mu\text{g}}{\text{g}} \right) \left(\frac{10^3 \text{ g}}{\text{kg}} \right) \left(\frac{1 \text{ kg } H_2O}{\text{L } H_2O} \right)$$

$$= \boxed{80 \text{ } \mu\text{g L}^{-1} C_2H_3Cl}$$

Note: In general, $[\text{ppb}] = \left[\frac{\mu\text{g}}{\text{L}} \right]$ in water.

(b) The conversion in air is:

$$\left(\frac{80 \times 10^{-9} \text{ mol } C_2H_3Cl}{\text{mol air}} \right) \left(\frac{62.5 \text{ g } C_2H_3Cl}{\text{mol}} \right) \left(\frac{10^6 \text{ } \mu\text{g}}{\text{g}} \right) \left(\frac{1 \text{ mol air}}{0.024 \text{ m}^3} \right) \left(\frac{1 \text{ m}^3}{10^3 \text{ L}} \right)$$

$$= \boxed{0.2 \text{ } \mu\text{g L}^{-1} C_2H_3Cl}$$

Note: See problems 1.1 and 1.2 for a calculation of what volume is occupied by a mole of air. $P = 1 \text{ atm}$ and $T = 293 \text{ K}$ are assumed.

1.4

We want to convert mass concentration to molarity and normality for five ions in drinking water. Recall that the definitions of molarity and normality are as follows:

$$\text{MOLARITY} = M = \frac{\# \text{ of moles of solute}}{\text{volume of solution}} = \left[\frac{\text{mol}}{\text{L}} \right]$$

1.4 (continued)

$$\text{NORMALITY} = N = \frac{\# \text{ of equivalents of solute}}{\text{volume of solution}} = \frac{\text{eq.}}{\text{L}}$$

where

$$\text{eq.} = |\text{net charge}| \times \text{moles}$$

Therefore

$$N = |\text{net charge}| \times M$$

Our conversions are as follows:

Species	Mass Concentration (mg L ⁻¹)	Atomic Weight (g mole ⁻¹)	Net Charge	M (mol L ⁻¹)	N (eq L ⁻¹)
Fe ³⁺	0.02	56	3	3.6×10^{-7}	1.1×10^{-6}
Ca ²⁺	9.8	40	2	2.5×10^{-4}	4.9×10^{-4}
Mg ²⁺	1.8	24	2	7.5×10^{-5}	1.5×10^{-4}
K ⁺	0.6	39	1	1.5×10^{-5}	1.5×10^{-5}
Na ⁺	4.6	23	1	2.0×10^{-4}	2.0×10^{-4}

1.5

We first want to find the total mass of CO₂ in the atmosphere, given:

$$M_{\text{atm}} = 5.1 \times 10^{18} \text{ kg}$$

$$Y_{\text{CO}_2} = 350 \text{ ppm}$$

We also know that

$$MW_{\text{air}} = 28.9 \text{ g mole}^{-1}$$

$$MW_{\text{CO}_2} = 44 \text{ g mole}^{-1}$$

Therefore, the total mass of CO₂ is:

$$M_{\text{CO}_2} = \left(\frac{350 \text{ mol CO}_2}{10^6 \text{ mol air}} \right) \left(\frac{1 \text{ mole air}}{29.8 \text{ g}} \right) \left(\frac{10^3 \text{ g}}{\text{kg}} \right) (5.1 \times 10^{18} \text{ kg air})$$

$$M_{\text{CO}_2} = (6.18 \times 10^{16} \text{ mol CO}_2) \left(\frac{44 \text{ g CO}_2}{\text{mol CO}_2} \right) \left(\frac{1 \text{ metric tons}}{10^6 \text{ g}} \right)$$

$$M_{\text{CO}_2} = 2.72 \times 10^{16} \text{ metric tons}$$

The rate of mass accumulation, then, is:

$$\text{Rate} = (2.72 \times 10^{16} \text{ metric tons}) \left(0.5 \frac{\%}{\text{year}} \right) = \boxed{1.4 \times 10^{10} \frac{\text{metric tons}}{\text{year}}}$$

1.6

(a) To find the CO_2 emission rate from private automobiles in the US, simply multiply:

$$\begin{aligned}
 & (1.2 \times 10^8 \text{ cars}) \left(\frac{10^4 \text{ miles}}{\text{car yr}} \right) \left(\frac{1 \text{ gal C}_8\text{H}_{18}}{18 \text{ miles}} \right) \left(\frac{3785 \text{ cm}^3 \text{ C}_8\text{H}_{18}}{\text{gal C}_8\text{H}_{18}} \right) \\
 & \times \left(\frac{0.72 \text{ g C}_8\text{H}_{18}}{1 \text{ cm}^3 \text{ C}_8\text{H}_{18}} \right) \left(\frac{96 \text{ g C}}{114 \text{ g C}_8\text{H}_{18}} \right) \left(\frac{44 \text{ g CO}_2}{12 \text{ g C}} \right) \left(\frac{1 \text{ metric tonne}}{10^6 \text{ g}} \right) \\
 & = \boxed{5.6 \times 10^8 \text{ metric tonnes CO}_2 \text{ yr}}
 \end{aligned}$$

(b) of the total mass accumulation of CO_2 in the atmosphere, US private automobiles account for $\frac{5.6 \times 10^8}{1.4 \times 10^{10}} \times 100 = 4\%$. Thus, if US auto CO_2 emissions were reduced to 0 through regulation, global CO_2 mass accumulation would still be 96% of our current estimates. However, automobiles worldwide may also be significant contributors to CO_2 accumulation, and so fuel efficiency regulations may reduce emissions.

1.7

First we want to find out how much PCE waste is produced each month:

$$\begin{aligned}
 \frac{\text{PCE waste produced}}{\text{month}} &= \frac{\text{PCE purchased}}{\text{month}} (1 - 0.3) \\
 &= \frac{250 \text{ L}}{\text{month}} (0.7) = 175 \frac{\text{L PCE}}{\text{month}}
 \end{aligned}$$

Now find out how long for the $0.7 \text{ m}^3 (=700 \text{ L})$ disposal container to fill:

$$T = \frac{700 \text{ L}}{175 \text{ L/month}} = \boxed{4 \text{ months}}$$

← container will have to be emptied this often

1.8

We want to determine the relative amounts of river water and groundwater to be used for Ecocity's water supply, given the following:


Barium drinking water standard = 2 mg L^{-1}

Barium concentration in river = 0.5 mg L^{-1}

Barium concentration in groundwater = 9 mg L^{-1}

Water supply needs for Ecocity = $10 \text{ m}^3 \text{ day}^{-1}$

We can use the mass balance concept to solve:

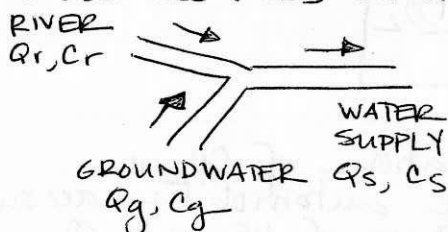

$$\begin{aligned} \text{Let } Q_s &= 10 \text{ m}^3 \text{ day}^{-1} \\ C_s &= 5 \text{ mg L}^{-1} \\ C_r &= 0.5 \text{ mg L}^{-1} \\ C_g &= 9 \text{ mg L}^{-1} \end{aligned}$$

Mass balance on water: $Q_r + Q_g = Q_s$

Mass balance on barium: $C_r Q_r + C_g Q_g = C_s Q_s$

Therefore:

$$Q_r + Q_g = 10 \text{ m}^3 \text{ day}^{-1}$$

$$(0.5 \text{ mg L}^{-1}) Q_r + (9 \text{ mg L}^{-1}) Q_g = (2 \text{ mg L}^{-1})(10 \text{ m}^3 \text{ d}^{-1})$$

Setting $Q_r = 10 - Q_g$, substituting into the second equation and solving for Q_g :

$$0.5(10 - Q_g) + 9Q_g = 20$$

$$5 - 0.5Q_g + 9Q_g = 20$$

$$8.5Q_g = 15$$

$$Q_g = 1.76 \text{ m}^3 \text{ d}^{-1}$$

$$\text{and } Q_r = 10 - Q_g = 8.24 \text{ m}^3 \text{ d}^{-1}$$

So Ecocity should use:

$1.8 \text{ m}^3 \text{ d}^{-1}$ (47%) groundwater $8.2 \text{ m}^3 \text{ d}^{-1}$ (53%) river water
--


Note: We can check to make sure this combination of flows will give us the desired barium concentration:

$$C_s = \frac{0.5 \times 8.2 + 9 \times 1.8}{10} = 2.0 \text{ mg L}^{-1} \checkmark$$

1.9

- (a) We want to find the characteristic residence time of air in the BAAQMD air basin, given that the basin encompasses 6094 mi^2 and a steady wind of 3 m s^{-1} blows from the west.

Consider a generic rectangular air basin:

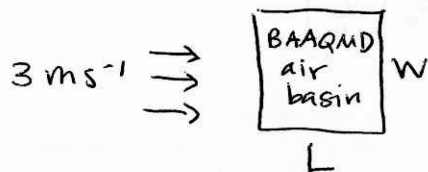

Let's start with the simplest case, with $L = W$:

$$L = \sqrt{6094} = 78.06 \text{ miles}$$

$$L = (78.06 \text{ miles})(1609 \text{ m mile}^{-1}) = 125600 \text{ m}$$

Thus, the residence time is:

$$\tau = \frac{125600 \text{ m}}{3 \text{ m s}^{-1}} = 41900 \text{ s}$$

$$\tau = (41900 \text{ s}) \left(\frac{1 \text{ min}}{60 \text{ s}} \right) \left(\frac{1 \text{ hr}}{60 \text{ min}} \right) = 11.6 \text{ hr}$$

$$\boxed{\tau = 10 \text{ hrs}} \quad (\text{keeping the same number of significant figures as we were given})$$

more generally, for any L or W :

$$L = \sqrt{\frac{\text{area}}{\text{aspect ratio}}}, \text{ where "aspect ratio"} = \frac{W}{L}$$

Therefore

$$\tau = \frac{\sqrt{\frac{\text{area}}{\text{aspect ratio}}}}{\text{wind velocity}}$$

For example, with an aspect ratio of 2, we would get $\tau = 8 \text{ hrs}$, which is not that different than what we found for the square.

- (b) We want to find t , the time required for restoration of the air basin to a pristine state. We simply want to select any t , such that $t \gg \tau$. So, $\boxed{t = 1 \text{ day to 1 week}}$ is sufficient. This assumes that the wind itself is pristine.

1.10

To find the characteristic time needed for the contaminant to return to its pre-spill level, we need to express the stock and flows in terms of known variables. Our system looks like:



So our stock is actually V , the lake volume, since the characteristic time required for flushing M from the lake is the same as the characteristic time required for flushing water from the lake.

Our flows can be written as either the inflow ($= F_i$) or the outflow ($= F_e + F_o$). We assume that the inflow equals the outflow.

Therefore, our characteristic time is:

$$\tau = \frac{V}{F_i} = \frac{V}{F_e + F_o}$$

1.11

Let's first find the number of democrats in the Senate after two years (i.e. one election). Of the 33.33 ($= 1/3$ of the Senate) Senators replaced or reelected, $2/3$, or 22.22, are democrats. Therefore the number of the democrats after the first election is:

$$\underbrace{50}_{\substack{\# \text{ to} \\ \text{start} \\ \text{with}}} - \underbrace{16.665}_{\substack{\# \text{ at end} \\ \text{of 6-year} \\ \text{term}}} + \underbrace{22.22}_{\substack{\# \text{ put} \\ \text{into office}}} = 55.555 \text{ democrats}$$

This assumes that of the 33.33 Senators who are at the end of their 6-year term, half are democrats.

1.11 (Continued)

Using the same assumption (that half of the seats put up for election were held by democrats) let's find the number of democrats after the second election.

$$\underbrace{55.555}_{\substack{\# \text{ to start} \\ \text{with}}} - \underbrace{16.665}_{\substack{\# \text{ at end} \\ \text{of 6-yr} \\ \text{term}}} + \underbrace{22.22}_{\substack{\# \text{ put into} \\ \text{office}}} = 61.11 \approx \boxed{61 \text{ democrats}}$$

1.12

Find the stock of water in the body first:

$$\text{STOCK} = (70 \text{ kg body}) \left(0.9 \frac{\text{kg H}_2\text{O}}{\text{kg body}} \right) = \underline{63 \text{ kg}}$$

Now find the flows. Since the body's water content is constant over time, the inflow equals the outflow. The inflow is:

$$\text{FLOW} = \left(1500 \frac{\text{g}}{\text{day}} + 700 \frac{\text{g}}{\text{day}} + 300 \frac{\text{g}}{\text{day}} \right) \frac{1 \text{ kg}}{10^3 \text{ g}} = 2.5 \frac{\text{kg}}{\text{day}}$$

The characteristic time is:

$$\tau = \frac{\text{STOCK}}{\text{FLOW}} = \frac{63 \text{ kg}}{2.5 \text{ kg/day}} = \boxed{25 \text{ days}} \approx 1 \text{ month}$$

1.13

We are given that the capacity of the Shasta reservoir is 4,552,000 acre-feet and that the average annual inflow is 5,439,000 acre-feet.

(a) The conversions are:

$$\text{CAPACITY: } (4,552,000 \text{ a-f}) \left(43,560 \frac{\text{ft}^3}{\text{a-f}} \right) \left(\frac{1 \text{ m}^3}{35.31 \text{ ft}^3} \right) = \boxed{5.6 \times 10^9 \text{ m}^3}$$

$$\text{INFLOW: } (5,439,000 \text{ a-f}) \left(43,560 \frac{\text{ft}^3}{\text{a-f}} \right) \left(\frac{1 \text{ m}^3}{35.31 \text{ ft}^3} \right) = \boxed{6.7 \times 10^9 \text{ m}^3 \text{ yr}^{-1}}$$

1.13 (continued)

(b) The characteristic time of a water molecule is found by:

$$T = \frac{\text{STOCK}}{\text{FLOW}} = \frac{\text{CAPACITY}}{\text{INFLOW}} = \frac{5.6 \times 10^9 \text{ m}^3}{6.7 \times 10^9 \text{ m}^3/\text{yr}} = 0.836 \text{ yr}$$

$$T = (0.836 \text{ yr}) \left(365 \frac{\text{days}}{\text{yr}} \right) = \boxed{305 \text{ days}}$$

(c) Because the chemical mixes thoroughly with the reservoir water and because it is inert, the characteristic time needed for the water to return to its pre-spill condition is the same as the characteristic time for a water molecule in the reservoir. Therefore:

$$T = \boxed{305 \text{ days}}$$

(d) The time is found by:

$$t = (5.6 \times 10^9 \text{ m}^3) \left(\frac{1 \text{ person-day}}{1400 \text{ L}} \right) \left(\frac{10^3 \text{ L}}{\text{m}^3} \right) \left(\frac{1}{30 \times 10^6 \text{ persons}} \right)$$

$$t = \boxed{133 \text{ days}}$$

(e) Use the concept of material balances to find how long it will take for the reservoir to go dry. Using a material balance on water:

$$\frac{\Delta S}{\Delta t} = f_{\text{in}} - f_{\text{out}}$$

Where

$\Delta S / \Delta t$ = change in (water) stock with time

f_{in} = flow in

f_{out} = flow out

If the reservoir goes dry, then $\Delta S = -5.6 \times 10^9 \text{ m}^3$. Since the reservoir level is currently unchanging, then $f_{\text{in}} = f_{\text{out}}$. If we reduce the inflow by 50%, then $f_{\text{in}} = \frac{1}{2} f_{\text{out}}$. Now we can solve for Δt :

$$\Delta t = \frac{\Delta S}{\frac{1}{2} f_{\text{out}} - f_{\text{out}}} = \frac{\Delta S}{-\frac{1}{2} f_{\text{out}}} = \frac{-5.6 \times 10^9 \text{ m}^3}{-\frac{1}{2} (6.7 \times 10^9 \text{ m}^3/\text{yr})} = \boxed{1.7 \text{ yrs}} \approx 620 \text{ days}$$

1.13 (continued)

(f) We can use the concept of material balances again to find the time required for the capacity of the reservoir to be depleted by 50%. Using a material balance on the silt:

$$\frac{\Delta S}{\Delta t} = f_{in} - f_{out}$$

where

ΔS = change in (silt) stock = $\frac{1}{2} (5.6 \times 10^9 \text{ m}^3)$
(since we want to know when the silt will "take up" half the reservoir capacity)

Δt = unknown

f_{in} = flow of silt in = $0.0023 (6.7 \times 10^9 \frac{\text{m}^3}{\text{yr}})$
 $f_{out} = 0$

So

$$\Delta t = \frac{\Delta S}{f_{in} - f_{out}} = \frac{\frac{1}{2} (5.6 \times 10^9 \text{ m}^3)}{0.0023 (6.7 \times 10^9 \frac{\text{m}^3}{\text{yr}})} = \boxed{182 \text{ years}}$$

1.14

We are given that the mass fraction of sulfate (SO_4^{2-}) in seawater is 2.7 g kg^{-1} . (Note that there are 0.334 g S per g sulfate). We are also given the total mass of the oceans to be $1.4 \times 10^{21} \text{ kg}$.

(a) The total mass is found by:

$$M_S = \left(\frac{2.7 \text{ g SO}_4^{2-}}{\text{kg seawater}} \right) \left(\frac{0.334 \text{ g S}}{\text{g SO}_4^{2-}} \right) (1.4 \times 10^{21} \text{ kg seawater})$$

$$M_S = \boxed{1.3 \times 10^{21} \text{ g}} = 1.3 \times 10^{15} \text{ metric tonnes}$$

(b) The total inflow of sulfur into the oceans is:

$$\text{INFLOW} = 160 \times 10^{12} \frac{\text{g}}{\text{yr}} + 100 \times 10^{12} \frac{\text{g}}{\text{yr}} = 2.6 \times 10^{14} \frac{\text{g}}{\text{yr}}$$

Therefore the characteristic time of sulfur in the oceans is:

$$\tau = \frac{\text{STOCK}}{\text{FLOW}} = \left(\frac{1.3 \times 10^{21} \text{ g S}}{2.6 \times 10^{14} \text{ g S/yr}} \right) = \boxed{5 \times 10^6 \text{ yr}}$$

1.15

(a) First, find the dimensions of an olympic-sized pool:

L: 50 m long

W: 8 lanes (9 ft each) + 2 washout lanes (1.5 ft each)

D: 2 to 3.5 m deep (take 2.7 m for average)

Therefore, the volume is:


$$V = (50 \text{ m}) \left(\frac{8 \text{ lanes} \times 9 \text{ ft} + 2 \text{ lanes} \times 1.5 \text{ ft}}{\text{ft}} \right) \times \frac{0.3048 \text{ m}}{\text{ft}} (2.7 \text{ m})$$

$$V = 3086 \text{ m}^3$$

Now, using the density of water (1 g cm^{-3}) and the molecular weight of water (18 g mol^{-1}); the total moles of water in the pool are:

$$\text{Moles} = 3086 \text{ m}^3 \times 10^6 \frac{\text{cm}^3}{\text{m}^3} \times \frac{1 \text{ g}}{\text{cm}^3} \times \frac{1 \text{ mole}}{18 \text{ g}} \approx \boxed{2 \times 10^8 \text{ moles}}$$

(b) We might expect a typical single-family home to look like:

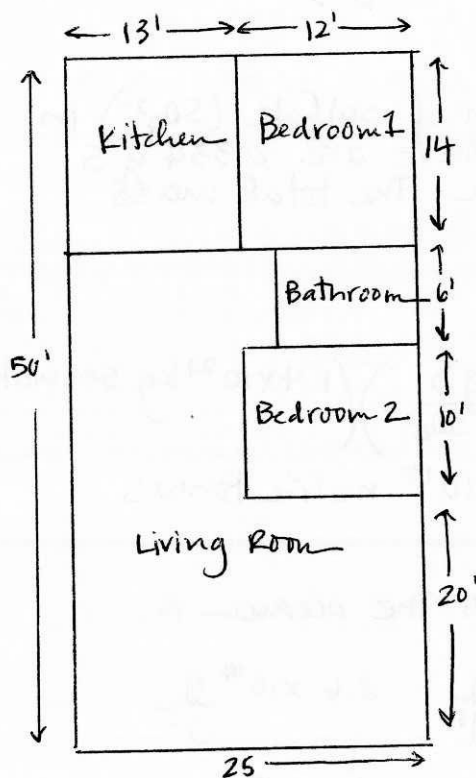

Assuming that the space occupied by furniture etc. is negligible:

$$\text{Volume} = 50' \times 25' \times 8' = 10,000 \text{ ft}^3$$

$$V = (10,000 \text{ ft}^3) \left(\frac{0.3048^3 \text{ m}^3}{\text{ft}^3} \right) = 283 \text{ m}^3$$

Assuming $P = 1 \text{ atm}$, $T = 293 \text{ K}$:


$$n = \frac{PV}{RT} = \frac{(1 \text{ atm})(283 \text{ m}^3)}{(82.05 \times 10^{-6} \frac{\text{atm m}^3}{\text{mol K}})(293 \text{ K})}$$

$$\boxed{n \approx 1 \times 10^4 \text{ moles}}$$

Chapter 2

2.1

This density characteristic of water has important consequences for the temperature stratification of water bodies ~ most notably lakes ~ in cold-winter climates. When lake water cools the densest 4°C water will sink, leaving even cooler water at the surface (see temperature profile at left). The cool surface water can then freeze (and, indeed, ice is less dense than water). Thus, instead of freezing from the bottom up, the lake freezes from the top ~ leaving fish and plankton with room to live.



2.2

(a) WATER:

$$(1 \text{ L H}_2\text{O}) \left(\frac{10^3 \text{ mL}}{\text{L}} \right) \left(\frac{1 \text{ g H}_2\text{O}}{\text{mL H}_2\text{O}} \right) \left(\frac{1 \text{ mol H}_2\text{O}}{18 \text{ g}} \right) = \boxed{56 \frac{\text{mol H}_2\text{O}}{\text{L}}}$$

AIR:Using the Ideal Gas Law $\left(\frac{n}{V} = \frac{P}{RT} \right)$:

$$\frac{(1 \text{ atm})}{\left(82.05 \times 10^{-3} \frac{\text{L} \cdot \text{atm}}{\text{mol K}} \right) (293 \text{ K})} = \boxed{0.042 \frac{\text{mol air}}{\text{L}}}$$

(b) We can assume the air molecules are in a cubic lattice:



The average volume occupied by a gas molecule is:

$$\left(\frac{1 \text{ L air}}{0.042 \text{ mol air}} \right) \left(\frac{1 \text{ mol}}{6.02 \times 10^{23} \text{ molecules}} \right) \left(\frac{10^3 \text{ cm}^3}{\text{L}} \right) = 4.0 \times 10^{-20} \text{ cm}^3 \text{ molecule}^{-1}$$

Therefore, the linear distance associated with one molecule is:

$$\sqrt[3]{4.0 \times 10^{-20} \text{ cm}^3} = \boxed{3.4 \times 10^{-7} \text{ cm} \approx 3 \times 10^{-9} \text{ m}}$$

So, the average distance from the center of one gas molecule to the center of its neighbor is ~ 3 nm.

2.2 (continued)

- (c) We can assume that the water molecules are in a cubic lattice. The average volume occupied by one water molecule is:

$$\left(\frac{1 \text{ L H}_2\text{O}}{56 \text{ mol}} \right) \left(\frac{1 \text{ mol}}{6.02 \times 10^{23} \text{ molecules}} \right) \left(\frac{10^3 \text{ cm}^3}{\text{L}} \right) \\ = 3.0 \times 10^{-23} \text{ cm}^3 \text{ molecule}^{-1}$$

The linear distance associated with one water molecule is:

$$\sqrt[3]{3.0 \times 10^{-23} \text{ cm}^3} = \boxed{3.1 \times 10^{-8} \text{ cm} \approx 3 \times 10^{-10} \text{ m}}$$

So, the average distance from the center of one water molecule to the center of its neighboring water molecule is $\sim 0.3 \text{ nm}$, which is approximately the size of a water molecule.

- (d) From Figure 2.A.1 the volume of the water in the oceans is $1400 \times 10^{15} \text{ m}^3$. The total mass of water is:

$$(1400 \times 10^{15} \text{ m}^3) \left(\frac{1000 \text{ kg H}_2\text{O}}{1 \text{ m}^3} \right) = 1.4 \times 10^{21} \text{ kg H}_2\text{O}$$

The mass of oxygen is:

$$(1.4 \times 10^{21} \text{ kg H}_2\text{O}) \left(\frac{16 \text{ kg O}}{18 \text{ kg H}_2\text{O}} \right) = \boxed{1.2 \times 10^{20} \text{ kg O}}$$

- (e) From Table 2.B.1 the mole fraction of atmospheric species in dry air can be recalculated for air with 2% H_2O using:

$$Y_{i,\text{moist}} = Y_{i,\text{dry}} (1 - Y_{\text{H}_2\text{O}})$$

We get the following recalculated mole fractions:

SPECIES	MOLE FRACTION (DRY)	MOLE FRACTION (2% H_2O)
N_2	0.7808	0.7652
O_2	0.2095	0.2053
H_2O	0	0.02
Ar	0.0093	0.00911
CO_2	0.00035	0.000343

2.2 (continued)

(e) From this we can calculate the molecular weight of air with 2% water:

$$MW_{air} = \left(28 \frac{g}{mol}\right) \left(0.7652\right) + \left(32 \frac{g}{mol}\right) \left(0.2053\right) \\ + \left(18 \frac{g}{mol}\right) \left(0.02\right) + \left(40 \frac{g}{mol}\right) \left(0.00911\right) \\ + \left(44 \frac{g}{mol}\right) \left(0.000343\right)$$

$$MW_{air} = 28.73 \text{ g mol}^{-1}$$

Now we can use the following expression to get the mass fraction of each atmospheric species:

$$\text{mass}_{\text{species}} = \frac{(\text{mole-fraction}_{\text{species}}) (MW_{\text{species}})}{MW_{air}}$$

We get the following mass fractions:

SPECIES	MASS FRACTION
N ₂	0.7456
O ₂	0.2286
H ₂ O	0.0125
Ar	0.0127
CO ₂	0.00053

Knowing that the total mass of the atmosphere is 5.1×10^{18} kg, we can calculate the mass of each element.

NITROGEN: All N is in N₂

$$\text{Mass}_N = (0.7456) (5.1 \times 10^{18} \text{ kg}) = 3.8 \times 10^{18} \text{ kg}$$

OXYGEN: O is in H₂O, O₂, CO₂

$$\text{Mass}_O = \left[\left(\frac{16}{18} \right) (0.0125) + (0.2286) + \left(\frac{32}{44} \right) (0.00053) \right] \\ \times (5.1 \times 10^{18} \text{ kg})$$

$$\text{Mass}_O = 1.2 \times 10^{18} \text{ kg}$$

2.2 (continued)

(c)

HYDROGEN: All H is in H_2O

$$Mass_H = \left(\frac{2}{18}\right)(0.0125)(5.1 \times 10^{18} \text{ kg}) = \boxed{7.1 \times 10^{15} \text{ kg}}$$

CARBON: All C is in CO_2

$$Mass_C = \left(\frac{12}{44}\right)(0.00053)(5.1 \times 10^{18} \text{ kg}) = \boxed{7.4 \times 10^{14} \text{ kg}}$$

2.3

(a) Using the ideal Gas Law:

$$\frac{n}{V} = \frac{P}{RT}, \text{ where } R = 82.05 \times 10^{-3} \frac{\text{L} \cdot \text{atm}}{\text{mol K}}$$

$$\text{and } \frac{n}{V} = \frac{1 \text{ mol}}{22.4 \text{ L}}$$

Therefore:

$$\frac{1 \text{ mol}}{22.4 \text{ L}} = \frac{P}{\left(82.05 \times 10^{-3} \frac{\text{L} \cdot \text{atm}}{\text{mol K}}\right)(T)}$$

So:

$$\frac{P}{T} = \frac{1}{273} \left[\frac{\text{atm}}{\text{K}} \right]$$

An obvious choice for P would be 1 atm, thus the temperature would be 273 K. So the conditions under which 1 mole of air occupies 22.4 L is:

$$\boxed{\begin{array}{l} P = 1 \text{ atm} \\ T = 273 \text{ K} = 0^\circ \text{C} \end{array}}$$

(b) Using the Ideal Gas Law again:

$$\frac{V}{n} = \frac{RT}{P} = \frac{\left(82.05 \times 10^{-3} \frac{\text{L} \cdot \text{atm}}{\text{mol K}}\right)(293 \text{ K})}{1 \text{ atm}}$$

$$= \boxed{24 \frac{\text{L}}{\text{mol}} \text{ air}}$$

2.4

(a) We can find the number of molecules of water with the following expression:

$$\text{Molecules}_{\text{H}_2\text{O}} = (\text{Mass}_{\text{atmosphere}}) (\text{MW}_{\text{air}})^{-1} (\text{mole fraction}_{\text{H}_2\text{O}}) \times (\text{Avogadro's number})$$

From problem 2.2 above we know:

$$\begin{array}{l} \text{Mass}_{\text{atmosphere}} = 5.1 \times 10^{18} \text{ kg} \\ \text{MW}_{\text{air}} = 28.73 \text{ g mol}^{-1} \\ \text{Mole fraction}_{\text{H}_2\text{O}} = 0.02 \end{array} \quad \left. \vphantom{\begin{array}{l} \text{Mass}_{\text{atmosphere}} \\ \text{MW}_{\text{air}} \\ \text{Mole fraction}_{\text{H}_2\text{O}} \end{array}} \right\} \text{reasonable estimates}$$

Therefore, the number of water molecules is:

$$\begin{aligned} & (5.1 \times 10^{18} \text{ kg}) \left(\frac{1 \text{ mol}}{28.73 \text{ g}} \right) \left(\frac{10^3 \text{ g}}{\text{kg}} \right) (0.02) \left(6.02 \times 10^{23} \frac{\text{molecules}}{\text{mol}} \right) \\ &= \boxed{2.1 \times 10^{42} \text{ molecules}} \end{aligned}$$

(b) Recall that:

$$\tau = \text{residence time} = \frac{\text{stock}}{\text{flow}}$$

In this case, the stock is what we found in part (a): The total number of water molecules in the atmosphere. We can convert the stock into a volume of water:

$$\begin{aligned} & (2.1 \times 10^{42} \text{ molecules}) \left(\frac{1 \text{ mol}}{6.02 \times 10^{23} \text{ molec}} \right) \left(\frac{18 \text{ g}}{\text{mol}} \right) \left(\frac{1 \text{ cm}^3}{\text{g H}_2\text{O}} \right) \left(\frac{1 \text{ m}^3}{10^6 \text{ cm}^3} \right) \\ &= 6.3 \times 10^{13} \text{ m}^3 \text{ H}_2\text{O} \end{aligned}$$

The flow to the Earth's surface, then, is:

$$\begin{aligned} \text{Flow} &= \frac{\text{stock}}{\tau} = \frac{6.3 \times 10^{13} \text{ m}^3}{(9 \text{ days})(86,400 \frac{\text{s}}{\text{day}})} \\ &= \boxed{8.1 \times 10^7 \text{ m}^3 \text{ s}^{-1}} \end{aligned}$$

2.4 (continued)

- (c) We first need to know the surface area of the Earth. Given that the mean radius of the Earth is 6370 km, the surface area is:

$$A_{\text{Earth}} = 4\pi r^2 = 4(3.1416)(6370 \text{ km})^2 \left(\frac{10^6 \text{ m}^2}{\text{km}^2} \right)$$

$$= 5.1 \times 10^{14} \text{ m}^2$$

The average rainfall is found by:

$$\frac{\left(8.1 \times 10^7 \frac{\text{m}^3}{\text{s}} \right) \left(\frac{86400 \text{ s}}{\text{day}} \right) \left(\frac{365 \text{ days}}{\text{yr}} \right)}{5.1 \times 10^{14} \text{ m}^2}$$

$$\approx \boxed{5 \text{ m yr}^{-1} = 500 \text{ cm yr}^{-1}}$$

- (d) Berkeley, California receives approximately 50 cm yr⁻¹ on average, and thus receives much less rainfall than the Earth's average. Las Vegas, Nevada, receives even less rainfall than Berkeley: 11 cm yr⁻¹. Compare both Berkeley and Las Vegas to Kula, Maui, Hawaii, with 1878 cm yr⁻¹.

2.5

- (a) We are given that $T = 35^\circ\text{C}$ ($= 308 \text{ K}$), $V = 1000 \text{ m}^3$, $P = 3 \text{ atm}$, and the composition of the gas is 65% CH₄ and 35% CO₂.

The mass of methane is:

$$\begin{aligned} \text{Mass}_{\text{CH}_4} &= (\text{Moles}_{\text{CH}_4}) (\text{MW}_{\text{CH}_4}) \\ &= \left(\frac{PV}{RT} \right) (\text{MW}_{\text{CH}_4}) \\ &= \frac{(0.65 \cdot 3 \text{ atm})(1000 \text{ m}^3)}{\left(\frac{82.05 \times 10^{-6} \text{ m}^3 \text{ atm}}{\text{mol K}} \right) (308 \text{ K})} \left(\frac{16 \text{ g}}{\text{mol}} \right) \left(\frac{1 \text{ kg}}{10^3 \text{ g}} \right) \end{aligned}$$

$$\boxed{\text{Mass}_{\text{CH}_4} = 1.2 \times 10^3 \text{ kg}}$$

The mass of carbon dioxide is:

$$\text{Mass}_{\text{CO}_2} = \frac{(0.35 \cdot 3 \text{ atm})(1000 \text{ m}^3)}{\left(\frac{82.05 \times 10^{-6} \text{ m}^3 \text{ atm}}{\text{mol K}} \right) (308 \text{ K})} \left(\frac{44 \text{ g}}{\text{mol}} \right) \left(\frac{1 \text{ kg}}{10^3 \text{ g}} \right)$$

$$\boxed{\text{Mass}_{\text{CO}_2} = 1.8 \times 10^3 \text{ kg}}_{18}$$

2.5 (Continued)

(b) Now $T = 25^\circ\text{C} = 298\text{ K}$.

The mass of methane is:

$$\text{Mass}_{\text{CH}_4} = \frac{(0.65 \cdot 3 \text{ atm})(1000 \text{ m}^3)}{(82.05 \times 10^{-6} \frac{\text{m}^3 \text{ atm}}{\text{mol K}})(298 \text{ K})} \left(\frac{16 \text{ g}}{\text{mol}} \right) \left(\frac{1 \text{ kg}}{10^3 \text{ g}} \right)$$

$$\text{Mass}_{\text{CH}_4} = \boxed{1.3 \times 10^3 \text{ kg}}$$

The mass of carbon dioxide is:

$$\text{Mass}_{\text{CO}_2} = \frac{(0.35 \cdot 3 \text{ atm})(1000 \text{ m}^3)}{(82.05 \times 10^{-6} \frac{\text{m}^3 \text{ atm}}{\text{mol K}})(298 \text{ K})} \left(\frac{44 \text{ g}}{\text{mol}} \right) \left(\frac{1 \text{ kg}}{10^3 \text{ g}} \right)$$

$$\text{Mass}_{\text{CO}_2} = \boxed{1.9 \times 10^3 \text{ kg}}$$

(c) From part (b) we know that the stock of gas is:

$$\text{Stock} = 1.3 \times 10^3 \text{ kg} + 1.9 \times 10^3 \text{ kg} = 3.2 \times 10^3 \text{ kg}$$

Therefore, the characteristic residence time of a gas molecule is:

$$\tau = \frac{\text{Stock}}{\text{Flow}} = \frac{3.2 \times 10^3 \text{ kg}}{400 \frac{\text{kg}}{\text{d}}} = \boxed{8 \text{ days}}$$

2.6

Water in home AIR:

To find the number of moles of water we can use the Ideal Gas Law. But first we need to find the partial pressure of water, which we can do since we know the relative humidity.

$$\text{RH} = \frac{P_{\text{H}_2\text{O}}}{P^\circ_{\text{H}_2\text{O}}} \times 100 = \frac{\text{actual partial pressure of water}}{\text{saturation vapor pressure}}$$

From Figure 3.B.1 we see that $P^\circ_{\text{H}_2\text{O}}$ at 23°C (a reasonable home temperature) is approximately 2700 Pa.
Therefore:

$$P_{\text{H}_2\text{O}} = 0.5 (2700 \text{ Pa}) \left(\frac{1 \text{ atm}}{1.01325 \times 10^5 \text{ Pa}} \right) = 0.013 \text{ atm}$$

2.6 (continued)

Therefore, the number of moles of water is:

$$n = \frac{PV}{RT} = \frac{(0.013 \text{ atm})(300 \text{ m}^3)}{\left(\frac{82.05 \times 10^{-6} \text{ atm m}^3}{\text{mol K}}\right)(296 \text{ K})} \approx 170 \text{ moles}$$

Water in glass:

$$n = (250 \text{ cm}^3) \left(\frac{1 \text{ g H}_2\text{O}}{\text{cm}^3 \text{ H}_2\text{O}} \right) \left(\frac{1 \text{ mol H}_2\text{O}}{18 \text{ g}} \right) = 14 \text{ moles}$$

So, there is more than 10 times as much water in the home air as in the glass.

2.7

(a) In dry air:

$$Y_{\text{O}_2} = 20.95\%$$

In air with 2% water vapor:

$$Y_{\text{O}_2} = 20.95\% (1 - 0.02) = \boxed{20.53\%}$$

(b) The molecular weight of air is found by:

$$MW_{\text{air}} = \sum_{\text{all } i} (MW_i)(Y_i),$$

where MW_i is the molecular weight of atmospheric species i , and Y_i is the mole fraction. The calculation is as follows:

SPECIES	$MW_i \left[\frac{\text{g}}{\text{mol}} \right]$	$Y_i [-]$	$(MW_i)(Y_i) \left[\frac{\text{g}}{\text{mol}} \right]$
N ₂	28	$(0.7809)(1-0.02)$	21.42
O ₂	32	$(0.2095)(1-0.02)$	6.57
Ar	40	$(0.0093)(1-0.02)$	0.36
CO ₂	44	$(0.00035)(1-0.02)$	0.02
H ₂ O	18	0.2	0.36
			$\Sigma = 28.74$

Therefore, the molecular weight of air with 2% water vapor is:

$$\boxed{MW_{\text{air}} = 28.7 \text{ g mol}^{-1}}$$

2.8

The diver is able to float because its mass (= test tube + air + water) is less than the mass of water it displaces. When the bottle is squeezed the pressure inside increases. The water is incompressible. As the air inside the diver is compressed, more water enters the diver, thus increasing the total mass of the diver. If enough pressure is applied, the mass of the diver becomes greater than the mass of the water it displaces. The diver then sinks.

2.9

- (a) Biochemical oxygen demand refers to the amount of oxygen required to oxidize decomposable compounds. These compounds are organic in nature, and include both soluble and nonsoluble constituents.
- (b) Phosphate is a macronutrient for lake biota. Thus, an increase in phosphate inputs to a lake can increase algae growth, thus increasing the flux of dead algae to the lake sediments. The bacterial decomposition of these algae ~ which are a form of BOD ~ leads to the depletion of oxygen in the deep lake water. Low oxygen levels can be harmful to fish, and can also lead to the release of toxic compounds (ammonia, hydrogen sulfide) from the sediments.
- (c) CO_2 and CH_4 are both greenhouse gases. Both compounds strongly absorb infrared radiation. Thus, infrared radiation emitted by the Earth's surface is increasingly trapped by CO_2 , CH_4 , and other greenhouse gases in the atmosphere. The radiation energy trapped, or absorbed, by these gases is translated into thermal energy, thus increasing the temperature of the atmosphere. This temperature increase ~ or global warming ~ may likely have profound impacts on global precipitation patterns, global sea levels, and other climate phenomena.

2.12

- (a) Hardness is defined as the sum of the normalities of the multivalent cations. Recall that normality is defined as:

$$N = M \times |\text{Net charge}|$$

where M = molarity (moles liter⁻¹). In this case, the three species that contribute the most to hardness (i.e. have the highest normalities) are also the 3 multivalent cation species with the highest molar concentrations:

- ① Ca^{2+}
- ② Mg^{2+}
- ③ Al^{3+}

- (b) The total hardness is found by:

$$\text{TH} = \left[\underbrace{(245 \times 10^{-6})(2)}_{\text{Ca}^{2+}} + \underbrace{(74 \times 10^{-6})(2)}_{\text{Mg}^{2+}} + \underbrace{(3.7 \times 10^{-6})(3)}_{\text{Al}^{3+}} \right] \frac{\text{eq}}{\text{L}}$$

$$\boxed{\begin{aligned} \text{TH} &= 650 \times 10^{-6} \text{ eq L}^{-1} \\ &= 0.65 \text{ meq L}^{-1} \end{aligned}}$$

- (c) Recall that ionic strength is defined as:

$$I = \frac{1}{2} \sum_{\text{for all } i} C_i z_i^2$$

where C_i is the molar concentration of species i , and z_i is the net charge of the species. The five species for which $\frac{1}{2} C_i z_i^2$ is the highest are:

- ① Ca^{2+}
- ② HCO_3^-
- ③ Mg^{2+}
- ④ SO_4^{2-}
- ⑤ Na^+

- (d) The total ionic strength caused by these five species is found by:

$$I = \frac{1}{2} \left[(245 \times 10^{-6})(2)^2 + (570 \times 10^{-6})(1)^2 + (74 \times 10^{-6})(2)^2 + (72 \times 10^{-6})(2)^2 + (200 \times 10^{-6})(1)^2 \right] \text{ M}$$

$$\boxed{\begin{aligned} I &= 1.2 \times 10^{-3} \text{ M} \\ &= 1.2 \text{ mM} \end{aligned}}$$

2.13

Molarity and normality are calculated as follows:

$$\text{Molarity} = M = \left(\frac{\text{mass concentration}}{\text{molecular weight}} \right)$$

$$\text{Normality} = N = M \times |\text{net charge}|$$

Using these definitions, we get the following results for Al^{3+} , Ba^{2+} , F^- , and NO_3^- :

Species	Mass concentration [mg L ⁻¹]	MW [g mol ⁻¹]	Charge [-]	M [mol L ⁻¹]	N [eq L ⁻¹]
Al^{3+}	0.19	27	+3	7.0×10^{-6}	2.1×10^{-5}
Ba^{2+}	0.16	134	+2	1.2×10^{-6}	2.3×10^{-6}
F^-	0.24	19	-1	1.3×10^{-5}	1.3×10^{-5}
NO_3^-	1.02	62	-1	1.6×10^{-5}	1.6×10^{-5}

2.14

(a) The principle of electroneutrality requires that $\sum_i Z_i C_i = 0$. Let's consider anions and cations separately:

ANIONS

Species	Charge (=Z) [-]	MW _i [g mol ⁻¹]	C _i [mmol L ⁻¹]	Z _i C _i [meq L ⁻¹]
Cl^-	-1	35	0.231	-0.231
SO_4^{2-}	-2	96	0.066	-0.132
F^-	-1	19	0.021	-0.021
NO_3^-	-1	62	0.013	-0.013
HCO_3^-	-1	61	0.267	-0.267
OH^-	-1	17	0.001*	-0.001

$$\Rightarrow \sum_{\text{anions}} Z_i C_i = -0.665 \text{ meq L}^{-1}$$

* Note that C_{OH^-} was calculated as follows:

$$[\text{OH}^-] = \frac{K_w}{[\text{H}^+]} = \frac{10^{-14}}{10^{-8}} = 10^{-6} \text{ M} = 10^{-3} \text{ mM}$$

2.14 (continued)

(a)

CATIONS

Species	Charge (= Z) [$-$]	MW _i [g mol ⁻¹]	C _i [mmol L ⁻¹]	Z _i C _i [meq L ⁻¹]
Ca ²⁺	+2	40	0.168	+0.335
Na ⁺	+1	23	0.104	+0.104
Al ³⁺	+3	27	0.0037	+0.011
K ⁺	+1	39	0.0020	+0.002
Fe ⁺	+3	56	0.0011	+0.002
H ⁺	+1	1	0.00001	+0.00001

$$\Rightarrow \sum_{\text{cations}} Z_i C_i = +0.454 \text{ meq L}^{-1}$$

$$\text{Therefore } \sum_{\text{for all } i} Z_i C_i = -0.665 \frac{\text{meq}}{\text{L}} + 0.454 \frac{\text{meq}}{\text{L}} = -0.21 \frac{\text{meq}}{\text{L}}$$

This suggests that a significant ion is missing from the list, and it is a cation.

- (b) Magnesium is one of the most abundant metals in the earth's crust, and often exists as Mg²⁺. If Mg²⁺ were the missing cation, we would need the following mass concentration:

$$\left(0.21 \frac{\text{meq}}{\text{L}}\right) \left(\frac{1 \text{ mmol}}{2 \text{ meq}}\right) \left(\frac{24 \text{ mg}}{\text{mmol}}\right) = 2.55 \text{ mg L}^{-1} \text{ Mg}^{2+}$$

Let's see if we are missing this much TDS. The total TDS measured is 43.7 mg L⁻¹. The TDS of the reported species is:

$$\begin{aligned} \text{TDS}_{\text{reported}} &= (8.1 + 6.3 + 0.4 + 0.8 + 16.3 + 6.7 + 2.4 \\ &\quad + 0.1 + 0.08 + 0.06) \text{ mg L}^{-1} \\ &= 41.2 \text{ mg L}^{-1} \end{aligned}$$

So, it looks like we are indeed missing 43.7 - 41.2 = 2.5 mg L⁻¹ of TDS, and Mg²⁺ seems like a good guess.

2.15

- (a) Total hardness is defined as the sum of the normalities of multivalent cations. The multivalent cations present in the river water are Ca^{2+} and Mg^{2+} . The hardness is calculated as follows:

Species	Mass Concentration [mg L^{-1}]	MW _i [g mol^{-1}]	M_i [mol L^{-1}]	N_i [eq L^{-1}]
Ca^{2+}	15	40	3.75×10^{-4}	7.5×10^{-4}
Mg^{2+}	4.1	24	1.71×10^{-4}	3.42×10^{-4}

$$\Sigma = 1.1 \times 10^{-3}$$

Therefore the total hardness is:

$$\boxed{\text{TH} = 1.1 \text{ meq L}^{-1}}$$

- (b) Carbonate hardness (CH) is found by summing the normalities of CO_3^{2-} and HCO_3^- . If this sum is less than TH, then CH is set equal to this sum. If this sum is greater than TH, then $\text{CH} = \text{TH}$. In this case, the normalities of the carbonate species are as follows:

$$\begin{aligned} & \underbrace{N_{\text{CO}_3^{2-}}}_{\left(0.0085 \frac{\text{mg}}{\text{L}}\right)\left(\frac{1 \text{ mmol}}{60 \text{ mg}}\right)(2)} + \underbrace{N_{\text{HCO}_3^-}}_{\left(58.4 \frac{\text{mg}}{\text{L}}\right)\left(\frac{1 \text{ mmol}}{61 \text{ mg}}\right)(1)} \\ & = 0.96 \text{ meq L}^{-1} \end{aligned}$$

Since this value is less than TH, $\boxed{\text{CH} = 0.96 \text{ meq L}^{-1}}$

- (c) We can assume that none of the components listed are filterable (although SiO_2 may be in the form of filterable particles, this is neglected here). Thus, TDS is found by:

$$\text{TDS} = [15 + 4.1 + 6.3 + 2.3 + 0.67 + 0.32 \times 10^{-3} + 58.4 + 0.0085 + 11.2 + 7.8 + 1 + 13.1] \text{ mg L}^{-1}$$

$$\boxed{\text{TDS} = 120 \text{ mg L}^{-1}}$$

2.15 (continued)

(d) Alkalinity is defined as:

$$ALK = \{ [OH^-] + [HCO_3^-] + 2[CO_3^{2-}] - [H^+] \} \text{ eq L}^{-1}$$

In this case:

$$[H^+] = \left(0.32 \frac{\mu g}{L} \right) \left(\frac{1 g}{10^6 \mu g} \right) \left(\frac{1 \text{ mole}}{1 g} \right) = 3.2 \times 10^{-7} M$$

$$[OH^-] = \frac{10^{-14} M^2}{[H^+]} = \frac{10^{-14} M^2}{3.2 \times 10^{-7} M} = 3.13 \times 10^{-8} M$$

$$[HCO_3^-] = \left(58.4 \frac{mg}{L} \right) \left(\frac{1 g}{10^3 mg} \right) \left(\frac{1 \text{ mol}}{61 g} \right) = 9.57 \times 10^{-4} M$$

$$[CO_3^{2-}] = \left(0.0085 \frac{mg}{L} \right) \left(\frac{1 g}{10^3 mg} \right) \left(\frac{1 \text{ mol}}{60 g} \right) = 1.42 \times 10^{-7} M$$

Thus:

$$ALK = [3.13 \times 10^{-8} + 9.57 \times 10^{-4} + 1.42 \times 10^{-7} - 3.2 \times 10^{-7}] \frac{\text{eq}}{L}$$

$$ALK = 0.96 \text{ meq L}^{-1}$$

(e) Ionic strength is defined as:

$$I = \frac{1}{2} \sum_{\text{for all } i} C_i Z_i^2$$

where C_i is the molar concentration of species i , and Z_i is the net charge of species i . The ionic strength is calculated as follows:

SPECIES	MASS CONC. [mg L ⁻¹]	MW _i [g mol ⁻¹]	C _i [M]	Z _i [-]	C _i Z _i ² [M]
Ca ²⁺	15	40	3.75 × 10 ⁻⁴	+2	1.5 × 10 ⁻³
Mg ²⁺	4.1	24	1.71 × 10 ⁻⁴	+2	6.84 × 10 ⁻⁴
Na ⁺	6.3	23	2.74 × 10 ⁻⁴	+1	2.74 × 10 ⁻⁴
K ⁺	2.3	39	5.90 × 10 ⁻⁵	+1	5.90 × 10 ⁻⁵
Fe ³⁺	0.67	56	1.20 × 10 ⁻⁵	+3	2.44 × 10 ⁻⁴
HCO ₃ ⁻	58.4	61	9.57 × 10 ⁻⁴	-1	9.57 × 10 ⁻⁴
CO ₃ ²⁻	0.0085	60	1.42 × 10 ⁻⁷	-2	5.68 × 10 ⁻⁷
SO ₄ ²⁻	11.2	96	1.17 × 10 ⁻⁴	-2	4.68 × 10 ⁻⁴
Cl ⁻	7.8	35.5	2.20 × 10 ⁻⁴	-1	2.20 × 10 ⁻⁴
NO ₃ ⁻	1	62	1.61 × 10 ⁻⁵	-1	1.61 × 10 ⁻⁵

$$\Rightarrow I = 2.0 \times 10^{-3} M$$

2.15 (continued)

(f) pH is defined as:

$$\text{pH} = -\log_{10}(\text{molar concentration of } \text{H}^+)$$

From part (d) we know $[\text{H}^+] = 3.2 \times 10^{-7} \text{ M}$.
Therefore:

$$\text{pH} = -\log[3.2 \times 10^{-7}] = 6.5$$

(g) The following condition must be met for the electroneutrality principle to be satisfied:

$$\sum_{\text{for all anions}} C_i |Z_i| = \sum_{\text{for all cations}} C_i |Z_i|$$

We can use the values calculated in part (e) for C_i and Z_i .

For anions:

$$\begin{aligned} \sum C_i Z_i &= \{(9.57 \times 10^{-4})(1) + (1.42 \times 10^{-7})(2) + (1.17 \times 10^{-4})(2) \\ &\quad + (2.20 \times 10^{-4})(1) + (1.61 \times 10^{-5})(1)\} \text{ M} \\ &= 1.43 \times 10^{-3} \text{ M} \end{aligned}$$

For cations:

$$\begin{aligned} \sum C_i Z_i &= \{(3.75 \times 10^{-4})(2) + (1.71 \times 10^{-4})(2) + (2.74 \times 10^{-4})(1) \\ &\quad + (5.90 \times 10^{-5})(1) + (1.20 \times 10^{-5})(3)\} \text{ M} \\ &= 1.46 \times 10^{-3} \text{ M} \end{aligned}$$

Therefore, we have satisfied electroneutrality to within $< 1\%$.

2.16

(a) ALUMINUM

Sources: Aluminum (Al) is the most abundant metal in the Earth's crust and the third most abundant element overall. Thus, it enters drinking water through contact with soil media. Al is also added to drinking water as alum, which is a flocculant.

Adverse effects: Al inhibits brain enzymes, thus causing general neurological problems. Elevated levels of Al are found in the brain tissue of those suffering from Alzheimer's disease and dialysis encephalopathy syndrome. Al can substitute into calcium hydroxyapatite in bone and alter the form and function of bone.

(b) BARIUM

Sources: Barium (Ba) exists in nature as ores. Oil drilling operations, as well as copper smelting operations, use Ba and can both be potential sources for groundwater contamination. Ba is also found in bleach, dyes, ceramics, and glass.

Adverse effects: Ba causes gastrointestinal disturbances, muscular weakness, and high blood pressure.

(c) NITRATE

Sources: Nitrate (NO_3^-) most commonly enters surface water and groundwater from agricultural runoff, since it is an important component of fertilizer. NO_3^- is also present in livestock manure, and thus can come from stockyard runoff as well.

Adverse effects: In infants, NO_3^- causes methemoglobinemia. NO_3^- is reduced to nitrite (NO_2^-) in the intestine, and NO_2^- interferes with the oxygen carrying capacity of the blood.

2.16 (continued)

(d) ARSENIC

Sources: Arsenic (As) exists in nature as ores, and thus groundwater in contact with As-bearing deposits can become contaminated. Arsenic can also be found in agricultural runoff, where it is used as an herbicide.

Adverse effects: At low levels, As causes skin cancer and will harm developing fetuses. At high levels, As is lethal since it breaks down protein compounds in vein walls and causes a loss of fluid and blood circulation.

SOURCES OF INFORMATION:

- ① Fact Sheets from EPA office of Groundwater and Drinking Water.
- ② Fact Sheets from California EPA office of Environmental Health Hazard Assessment.

2.17

(a) Total hardness is defined as the sum of the normalities of multivalent cations in the water of interest.

(b) Calcium (Ca^{2+}) and magnesium (Mg^{2+}) are the two most important species that contribute to hardness in treated public water.

$$(c) \text{ TH} = \underbrace{(0.3 \times 10^{-3} \text{ M})}_{N_{\text{Ca}^{2+}}} (2) + \underbrace{(0.1 \times 10^{-3} \text{ M})}_{N_{\text{Mg}^{2+}}} (2) \text{ eq L}^{-1}$$

$$\boxed{\text{TH} = 8.0 \times 10^{-4} \text{ eq L}^{-1} = 0.8 \text{ meq L}^{-1}}$$

2.17 (continued)

(d) The following table is helpful for our calculations:

SPECIES	MASS CONC. [mg L ⁻¹]	MW [g mol ⁻¹]	M [mol L ⁻¹]	N [eq L ⁻¹]
Na ⁺	56	23	2.43×10^{-3}	2.43×10^{-3}
Ca ²⁺	40	40	1.00×10^{-3}	2.00×10^{-3}
Mg ²⁺	30	24	1.25×10^{-3}	2.50×10^{-3}
HCO ₃ ⁻	190	61	3.11×10^{-3}	3.11×10^{-3}
Cl ⁻	165	35.5	4.65×10^{-3}	4.65×10^{-3}
Al ³⁺	30	27	1.11×10^{-3}	3.33×10^{-3}

Therefore:

$$TH = \underbrace{2.00 \times 10^{-3} \frac{\text{eq}}{\text{L}}}_{\text{Ca}^{2+}} + \underbrace{2.50 \times 10^{-3} \frac{\text{eq}}{\text{L}}}_{\text{Mg}^{2+}} + \underbrace{3.33 \times 10^{-3} \frac{\text{eq}}{\text{L}}}_{\text{Al}^{3+}}$$

$$TH = 7.8 \text{ meq L}^{-1}$$

$$CH = 3.1 \text{ meq L}^{-1}$$

$$NCH = TH - CH = 4.7 \text{ meq L}^{-1}$$

Note: Although CO₃²⁻ is likely present, its concentration is going to be very small relative to HCO₃⁻ and thus will not contribute significantly to CH.

(e) We can use the table from part (d) to check the electroneutrality balance.

$$\begin{aligned} \text{For anions: } \sum C_i z_i &= \sum \text{Normalities} \\ &= \{3.11 \times 10^{-3} + 4.65 \times 10^{-3}\} \frac{\text{eq}}{\text{L}} \\ &= 7.76 \text{ meq L}^{-1} \end{aligned}$$

$$\begin{aligned} \text{For cations: } \sum C_i z_i &= \sum \text{Normalities} \\ &= 10.3 \text{ meq L}^{-1} \end{aligned}$$


Thus, we are missing some anions, perhaps SO₄²⁻ or NO₃⁻, and electroneutrality is not satisfied.

2.18

- (a) Carbonate species, including HCO_3^- and CO_3^{2-} , are the dominant contributors to alkalinity in natural waters.
- (b) Alkalinity is a measure of the capacity of a water to neutralize strong acid. Thus, a water with high alkalinity is capable of resisting pH changes. A water with high alkalinity may also have high carbonate hardness, which can lead to the problems of scale in pipes, and "soap curd" formation during home cleaning activities.
- (c) Any species that is capable of "taking up" a H^+ will contribute positively to alkalinity. These include:
 CO_3^{2-} , PO_4^{3-} , HCO_3^- , OH^- , and HS^-

2.19

The following schematic will help us in our solids calculations.

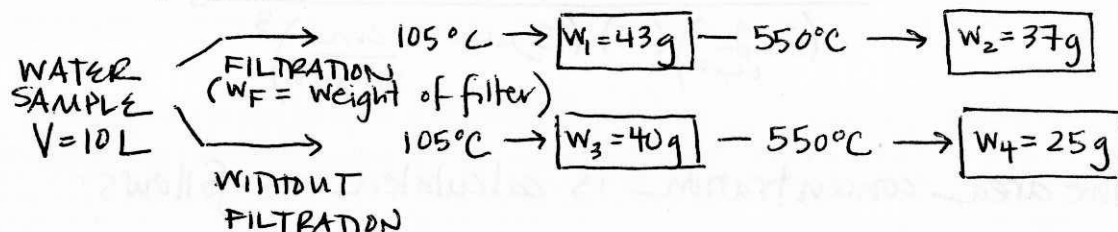

$$\underline{\underline{\text{TS}}} = \text{total solids} = \frac{W_3}{V} = \frac{40\text{ g}}{10\text{ L}} = \underline{\underline{4\text{ g L}^{-1}}}$$

$$\underline{\underline{\text{TVS}}} = \text{total volatile solids} = \frac{W_3 - W_4}{V} = \frac{(40 - 25)\text{ g}}{10\text{ L}} = \underline{\underline{1.5\text{ g L}^{-1}}}$$

$$\underline{\underline{\text{SS}}} = \text{suspended solids} = \frac{W_1 - W_F}{V} = \frac{(43 - 15)\text{ g}}{10\text{ L}} = \underline{\underline{2.8\text{ g L}^{-1}}}$$

$$\underline{\underline{\text{VSS}}} = \text{volatile suspended solids} = \frac{W_1 - W_2}{V} = \frac{(43 - 37)\text{ g}}{10\text{ L}} = \underline{\underline{0.6\text{ g L}^{-1}}}$$

$$\underline{\underline{\text{TDS}}} = \text{TS} - \text{SS} = \underline{\underline{1.2\text{ g L}^{-1}}}$$

2.20

(a) The number concentration is calculated as follows:

$$\frac{\#}{\text{cm}^3} = \left(\frac{\text{mass particle}}{\text{volume H}_2\text{O}} \right) \left(\frac{\text{volume particle}}{\text{mass particle}} \right) \left(\frac{1 \text{ particle}}{\text{volume 1 particle}} \right)$$

$$\frac{\#}{\text{cm}^3} = (C) \left(\frac{1}{\rho} \right) \left(\frac{1}{\frac{\pi}{6} d_p^3} \right) = \frac{6C}{\rho \pi d_p^3}$$

where C = mass concentration
 ρ = particle density
 d_p = particle diameter

For sample A:

$$\frac{\#}{\text{cm}^3} = \frac{(6) \left(5 \frac{\text{mg}}{\text{L}} \right) \left(\frac{1000 \text{ L}}{\text{m}^3} \right) \left(\frac{1 \text{ m}^3}{10^6 \text{ cm}^3} \right) \left(\frac{1 \text{ g}}{1000 \text{ mg}} \right)}{\left(2 \frac{\text{g}}{\text{cm}^3} \right) (\pi) \left(5 \mu\text{m} \cdot \frac{1 \text{ cm}}{10^4 \mu\text{m}} \right)^3} = 3.8 \times 10^4$$

For sample B:

$$\frac{\#}{\text{cm}^3} = \frac{(6) \left(5 \frac{\text{mg}}{\text{L}} \right) \left(\frac{1000 \text{ L}}{\text{m}^3} \right) \left(\frac{1 \text{ m}^3}{10^6 \text{ cm}^3} \right) \left(\frac{1 \text{ g}}{1000 \text{ mg}} \right)}{\left(2 \frac{\text{g}}{\text{cm}^3} \right) (\pi) \left(15 \mu\text{m} \cdot \frac{1 \text{ cm}}{10^4 \mu\text{m}} \right)^3} = 1.4 \times 10^3$$

The area concentration is calculated as follows:

$$\frac{\mu\text{m}^2}{\text{cm}^3} = \left(\frac{\#}{\text{cm}^3} \right) \left(\frac{\text{cross-sectional area}}{\text{particle}} \right)$$

$$\frac{\mu\text{m}^2}{\text{cm}^3} = \frac{\#}{\text{cm}^3} \cdot \pi \left(\frac{d_p}{2} \right)^2$$

For sample A:

$$\frac{\mu\text{m}^2}{\text{cm}^3} = \left(3.8 \times 10^4 \frac{\#}{\text{cm}^3} \right) (\pi) \left(\frac{5 \mu\text{m}}{2} \right)^2 = 7.5 \times 10^5 \frac{\mu\text{m}^2}{\text{cm}^3}$$

2.20 (continued)

(a)

For Sample B:

$$\frac{\mu\text{m}^2}{\text{cm}^3} = \left(1.41 \times 10^3 \frac{\#}{\text{cm}^3}\right) (\pi) \left(\frac{15 \mu\text{m}}{2}\right)^2 = 2.5 \times 10^5 \frac{\mu\text{m}^2}{\text{cm}^3}$$

Therefore our table looks like this:

	Sample A	Sample B
Concentration ($\#/\text{cm}^3$)	3.8×10^4	1.4×10^3
Area Concentration ($\mu\text{m}^2/\text{cm}^3$)	7.5×10^5	2.5×10^5


$$(b) \quad \frac{\text{Turbidity A}}{\text{Turbidity B}} = \frac{7.5 \times 10^5 \mu\text{m}^2 \text{cm}^{-3}}{2.5 \times 10^5 \mu\text{m}^2 \text{cm}^{-3}} = 3$$

Therefore, sample A is **3 times** more turbid than sample B.

(c) A nephelometer is an instrument used to measure turbidity in a water sample. Unlike a photometer, which measures how much light is transmitted through a sample, a nephelometer measures how much light is scattered by a sample.

2.21

- (a) MTBE is used as an oxygenated additive in gasoline. In 1988, ~~USEPA~~ approved the use of MTBE in gasoline up to 15% by volume. Currently, MTBE is added to about 30% of the gasoline consumed in the US and to virtually all of the gasoline consumed in CA.
- (b) The extra oxygen atom in MTBE leads to more complete gasoline combustion, and therefore a reduction in CO emissions. MTBE also helps to reduce SO_2 and VOC emissions by diluting the sulfur, aromatic, and olefinic contents of gasoline.
- (c) The oxygen in MTBE provides better fuel combustion:



- (d) The majority of health risks associated with MTBE are due to airborne exposure. The current average ambient concentration in California is ~ 2 ppb. To receive an equivalent exposure from MTBE-contaminated drinking water, it would have to have ~ 70 ppb MTBE. Most data collected to date suggests that drinking water levels of MTBE are very low. Nevertheless, MTBE contamination of surface water and groundwater sources is attracting more attention. MTBE surface water contamination is a result of the use of gasoline-powered vehicles on lakes and rivers. Groundwater contamination is due to leaking underground storage tanks.
- (e) Animal studies suggest that MTBE may be a weak carcinogen. The US EPA has suggested that MTBE should be considered as having a "human carcinogenic hazard potential."

2.21 (continued)

- (f) The taste and odor thresholds are low for MTBE. Thus, water with low levels of MTBE tastes and smells like turpentine. Also, ecological effects from MTBE contamination of lakes, reservoirs, and rivers are possible, but not well-understood.

Chapter 3

3.1

- (a) When a system is at chemical equilibrium, the concentrations of species in the system remain constant and the distribution of those species is determined by thermodynamics. A system that is not at equilibrium will tend to approach equilibrium at some rate. This rate is governed by chemical kinetics. Let's take the example of a system with 4 chemical species - A, B, C and D - which react according to the following expression:



Both k_f and k_b are rate constants which tell us how fast the reactions between A and B and between C and D respectively, proceed. The overall rate of the forward reaction is described by:

$$R_f = k_f [A][B]$$

Likewise, the overall rate of the backward reaction is:

$$R_b = k_b [C][D]$$

At equilibrium the rate of the forward reaction equals the rate of the backward reaction:

$$k_f [A][B] = k_b [C][D]$$

Rearranging, and recalling that an equilibrium constant is defined as the quotient of reaction products over reactants:

$$\frac{k_f}{k_b} = \frac{[C][D]}{[A][B]} = K_{eq}$$

Thus, the equilibrium constant is a ratio of the kinetic rate constants, and equilibrium and kinetics are related.